RF8.PPZ.4.SD

Four Solid Door GN-compatible Pizza Preparation Fridge

Series: ReFlex
Dimensions: 2285 mm (W) × 800 mm (D) × 1140 mm (H)*
Gross Volume: 711 L

* Height with legs is adjustable from 1150 to 1200.

Project:

Item #:



A four solid door pizza preparation fridge designed to store food at safe temperatures in busy kitchens at venues such as restaurants, clubs, pubs, and cafés. It is engineered to operate in ambient environments of up to 40°C with the lids closed or 30°C with the lids open. Temperatures are adjustable from 1°C to 5°C, or further via the SKOPE-connect smartphone app from 0°C to 15°C. The entire cabinet is made from 304 AISI stainless steel through the interior and exterior, over an insulating cyclopentane foamed core. Suitable for use with 12 × GN1/3 pans or 24 × GN1/6 pans, the fridge comes with a removable, food-grade, 13 mm thick plastic cutting board that is suitable to use as a pizza preparation counter. The four self-closing solid swing doors with a stay-open position of 90° are fitted with built-in key locks. Inside the fridge, there is a door-activated LED light and 2 × adjustable-height plastic-coated wire shelves per door. The side-mounted fully removable refrigeration cartridge uses R290 natural refrigerant for low energy consumption, low heat discharge and low noise output. It is fully front-breathing and can be easily removed in line with best practice for safe servicing of flammable refrigerants. The fridge includes a controller that connects to the free SKOPE-connect app to enable you to set temperatures and alerts, monitor temperatures and energy, and more. The fridge is certified to all Australian and New Zealand refrigeration and electrical safety standards.



3 YEAR
Warranty

Natural Refrigerant

304
304 Stainless Steel

GN-compatible


SKOPE-connect

© 2020 SKOPE Industries Limited | We reserve the right to alter specifications without notice.

Email: skope@skope.com AUS Freephone: 1800 121 535 NZ Freephone: 0800 947 5673 skope.com

PSS0669 | Rev. 1.13 | June 2026

RF8.PPZ.4.SD

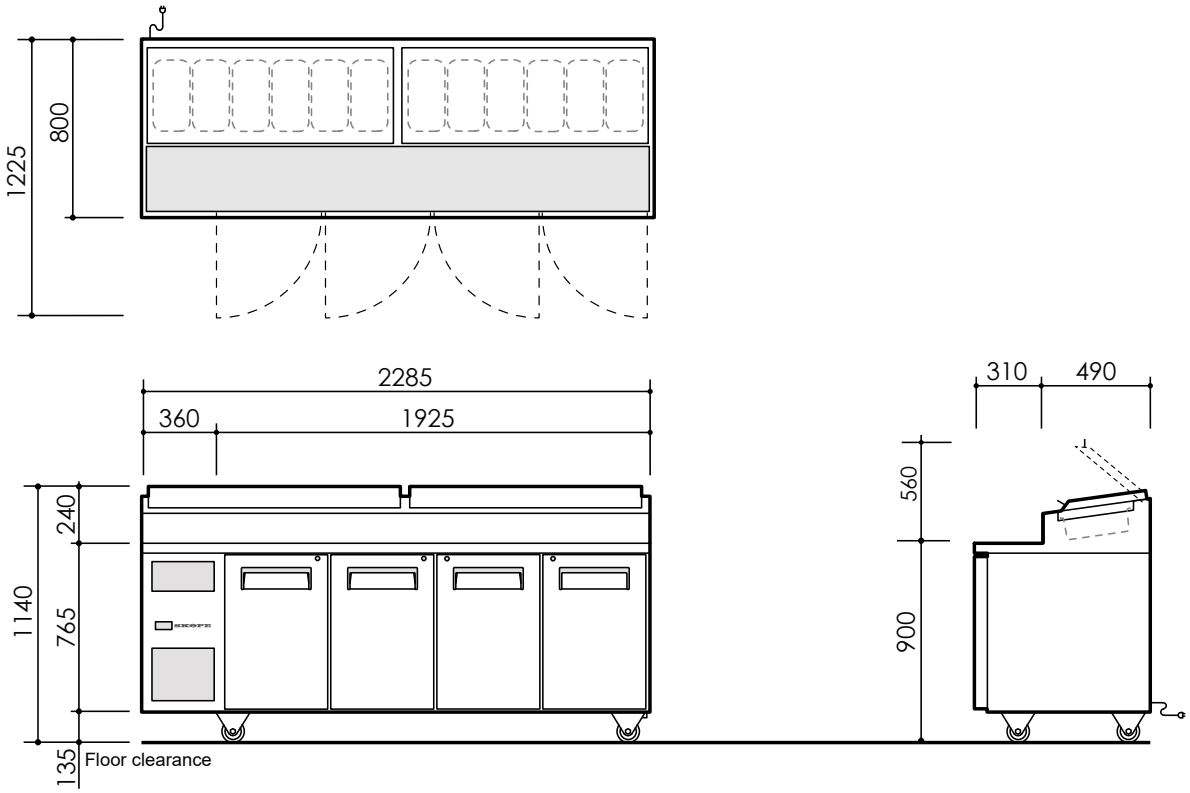

Cabinet

Range	Preparation	
Finish	304 AISI stainless steel	
Insulation	Type	PU foam
	Thickness (mm)	50
	Blowing Agent	Cyclo-iso pentane (C5H10/C5H12)
Doors	Type	Solid swing door (barrel lock)
	Opening Size	Height (mm) 590
		Width (mm) 370
Shelving	Eight plastic-coated wire shelves 4 × adjustable height outer shelf (415W × 610D), 4 × adjustable height inner shelf (475W × 610D)	
Gastronorm	Size	Pot wells: 1/3 or 1/6, Fridge: 1/1
Lighting*	3 × 400 mm, 4 W LED lights (door-activated)	

Dimensions†

	External	Internal	Packed
Width (mm)	2285	1835	2335
Depth (mm)	800	640	870
Height (mm)	**1140** (standard castors) 1150 to 1200 (legs) 1005 (plinth mount)	605	1200
Weight (kg)	233		280
Gross Volume (L)	711		
Footprint (m²)	1.83		

Ventilation (mm)

Top	Not required	**Sides**	Not required	**Rear**	Not required

Performance

Product Temperature Range (°C)	1 to 5 (adjustable with SKOPE-connect 0 to 15)
Maximum Ambient Temperature (°C)	40
Sound Level (dB(A))	68

Greenhouse and Energy Minimum Standards (GEMS)

Star Rating	n.a.
Product Temperature Class	M1 (-1 to 5°C)
Total Energy Consumption	5.84 kWh/24 h
Annual Running Costs	$639 (@ $0.30/kWh)

Electrical

Supply	220 to 240 volts a.c., 50 Hz, single phase supply
Cord	2 m power cord with 3-pin, 10 amp plug
Current Draw (A)	3.5

Refrigeration

Controller	SCS Connect (SKOPE-connect™ compatible)			
System Type	Removable cartridge			
Cartridge Weight (kg)	30			
Refrigerant/Charge	R290/90 g			
Nominal Capacity (W)	900 (EN12900 MBP)			
Heat Rejection (W)	**Average** 250	**Peak** 300		
Defrost Type	Automatic, electric			
Drainage	No plumbing required			

Dimensional Tolerances

† Allow for dimensional tolerances when installing the cabinet(s).

Linear dimensions	Single cabinet	Multiple cabinets	
		At each joint	At each end wall
Less than 1 metre	±5 mm	±5 mm	+15 mm
More than 1 metre	-5 mm to +10 mm	-5 mm to +10 mm	+15 mm

* Accessible via the free SKOPE-connect™ app.

RF8.PPZ.4.SD
on the SKOPE website

© 2020 SKOPE Industries Limited | We reserve the right to alter specifications without notice.

Email: skope@skope.com AUS Freephone: 1800 121 535 NZ Freephone: 0800 947 5673 skope.com