TME1500N-AC

Three Glass Door Top Mount Upright Fridge, Lit Sign

Series: ActiveCore
Dimensions: 1705 mm (W) × 745 mm (D) × 2200 mm (H)
Capacity: 1399 L

Project:

Item #:



A high-efficiency, top-mounted, heavy duty, 3-door display fridge suitable for front and back-of-house applications including restaurants, cafés, clubs, pubs, bars, quick service restaurants, and more. Made from powder-coated, galvanised steel with colour options, the cabinet comes complete with five plastic-coated wire shelves per door, easily adjustable via SKOPE's unique ezi-clip and numbered shelf supports. The "frameless" glass doors provide maximum product viewing and are designed for condensation protection in most environments via the double-glazed, argon-filled, low-e, insulated panels. The high impact built-in LED lights can be timed to turn on and off according to your opening times via the free SKOPE-connect smartphone app. An illuminated sign panel is included, with space to display your own backlit branding. With M1 compliance, the fridge is engineered to store food and drinks at a standard 1°C to 4°C (adjustable up to 15°C). It is certified under GEMS to the mandatory climate class 3 and is fully tested to operate in ambient environments of up to 40°C (climate class 5). The fridge uses R290 natural refrigerant for ultra-low energy consumption, low heat discharge, and low noise output. The top-mounted, fully removable, modular refrigeration cartridge can be easily removed in line with best practice for safe servicing of flammable refrigerants. With the same cartridge being used in both top and bottom-mounted fridges, you achieve the fastest possible servicing times with minimal business disruption. The fridge includes a smart controller that connects to the free SKOPE-connect app, enabling you to set temperatures and alerts, monitor temperatures and energy, and more. The fridge is certified to all Australian and New Zealand refrigeration and electrical safety standards.




Warranty | ActiveCore Technology | Natural Refrigerant | GEMS | SKOPE-connect

© 2025 SKOPE Industries Limited | We reserve the right to alter specifications without notice.

Email: skope@skope.com AUS Freephone: 1800 121 535 NZ Freephone: 0800 947 5673 skope.com

TME1500N-AC

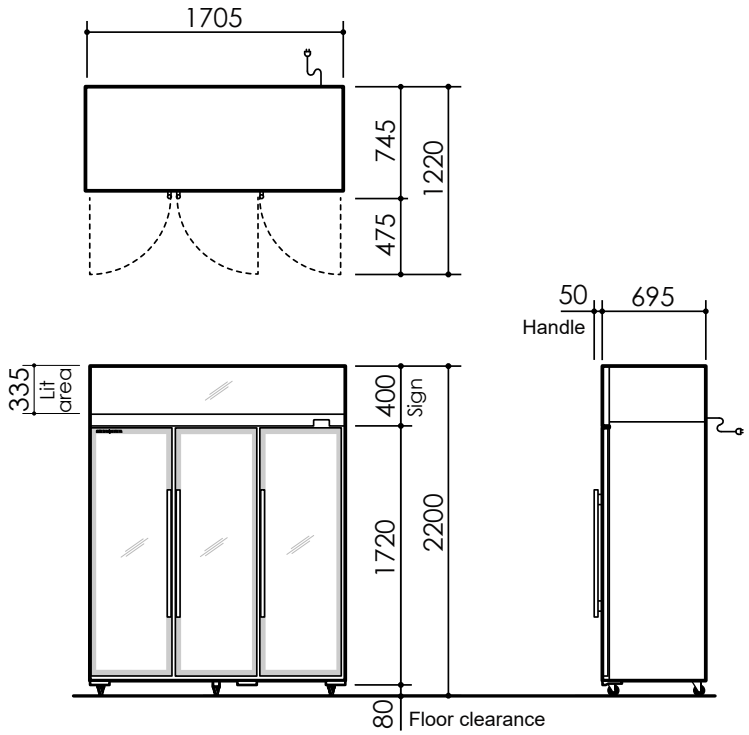

Cabinet

Range	TME	
Finish	Powder-coated galvanised steel	
Insulation	Type	PU foam
	Thickness (mm)	50
	Blowing Agent	Cyclo-iso pentane (C5H10/C5H12)
Doors	Type	Glass swing door (double-glazed, single low-e, argon-filled, toughened, safety glass), tab-locking
	Opening Size	Height (mm) 1570
		Width (mm) 470
Shelving	10 × outer shelf (500W × 470D), 5 × inner shelf (570W × 470D)	
Lighting	Sign	1 × 1590 mm, 18 W LED
	Interior*	3 × 1400 mm, 15 W LED

Dimensions†

	External	Internal	Packed
Width (mm)	1705	1605	1720
Depth (mm)	745	555	780
Height (mm)	2200 (castors)	1570	2205
Weight (kg)	285		292
ANSI Volume (L)	1399		
Footprint (m^2)	1.27		

Ventilation (mm)

Top	300	**Sides**	Not required	**Rear**	Not required

Product Loading

Facing	330 ml can	110	660 ml bottle	110
Loading	330 ml can	805	600 ml bottle	630

Performance

Product Temperature Range (°C)*	1 to 5 (adjustable 1 to 15)
Maximum Ambient Temperature (°C)	40
Sound Power Level (dB(A))	61

Greenhouse and Energy Minimum Standards (GEMS)

Star Rating	7
Product Temperature Class	M1 (-1 to 5°C)
Total Energy Consumption	6.14 kWh/24 h
Annual Running Costs	$672 (@ $0.30/kWh)

Electrical

Supply	220 to 240 volts a.c., 50 Hz, single phase supply
Cord	2.1 m power cord with 3-pin, 10 amp plug
Current draw (A)	2.1

Refrigeration

Controller	SCS Connect (SKOPE-connect™ compatible)
System Type	Removable cartridge
Cartridge Weight (kg)	29
Refrigerant/Charge	R290/99 g
Nominal Capacity (W)	547
Heat Rejection (W)	Average 245 Peak 330
Defrost Type	Automatic, off-cycle
Drainage	No plumbing required

* Controllable via SCS Connect.

Dimensional Tolerances

† Allow for dimensional tolerances when installing the cabinet(s).

Linear dimensions	Single cabinet	Multiple cabinets	
		At each joint	At each end wall
Less than 1 metre	±5 mm	±5 mm	+15 mm
More than 1 metre	-5 mm to +10 mm	-5 mm to +10 mm	+15 mm

TME1500N-AC
on the SKOPE website

© 2025 SKOPE Industries Limited | We reserve the right to alter specifications without notice.

Email: skope@skope.com AUS Freephone: 1800 121 535 NZ Freephone: 0800 947 5673 skope.com