Two Solid Door GN-compatible Upright Fridge

Series: ReFlex
Dimensions: 1380 mm (W) × 855 mm (D) × 1955 mm (H)

Project:

Item #:



A GN2/1 two solid door upright fridge designed to store food at safe temperatures in busy kitchens at venues such as restaurants, clubs, pubs, and cafés. It is engineered to safely store food, and is energy-tested at climate class 5 to operate in ambient environments of up to 40°C. Certified M1 performance means guaranteed food storage between 1°C and 4°C, which is further adjustable via the SKOPE-connect smartphone app from -2°C to 15°C. The entire cabinet is made from 304 AISI stainless steel through the interior and exterior, over an insulating cyclopentane foamed core. With a 1955 mm height (including castors), 1380 mm width and 855 mm depth, it is suitable for food storage in back-of-house applications and has been built to take 2/1 Gastronorm pans. The two self-closing solid swing doors are fitted with built-in key locks. Inside the fridge, there is a door-activated LED light and 4 × height-adjustable plastic-coated wire shelves per door. The top-mounted, fully removable, refrigeration cartridge uses R290 natural refrigerant for low energy consumption, low heat discharge and low noise output. It can be easily removed in line with best practice for safe servicing of flammable refrigerants. The fridge includes a controller that connects to the free SKOPE-connect app to enable you to set temperatures and alerts, monitor temperatures and energy, and more. The fridge is certified to all regional refrigeration and electrical safety standards.



3 YEAR
Warranty

304
304 Stainless Steel

GN-compatible

Natural Refrigerant


SKOPE-connect

© 2026 SKOPE Industries Limited | We reserve the right to alter specifications without notice.

Email: skope@skope.com AUS Freephone: 1800 121 535 NZ Freephone: 0800 947 5673

skope.com

RF8.UPR.2.SD

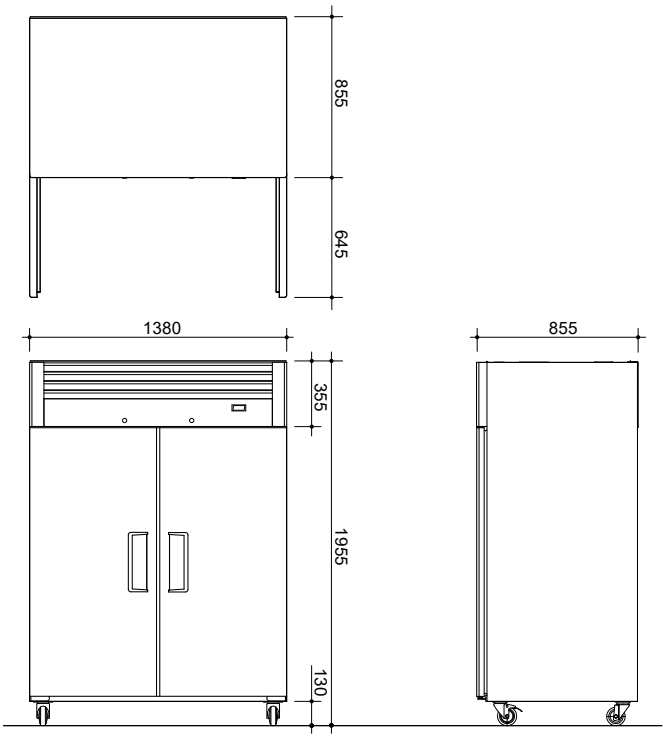

Cabinet

Range	Upright	
Finish	Stainless steel 304 AISI	
Insulation	Type	PU Foam
	Thickness (mm)	54
	Blowing Agent	Cyclo-iso Pentane (C5H10/C5H12)
Doors	Type	Solid swing door (Barrel Lock)
	Opening Size	Height (mm) 1350
		Width (mm) 570
Shelving	Eight adjustable height plastic coated wire shelves Adjustable height shelves: 530mm wide x 650mm deep	
Gastronorm	Size	2/1
Lighting*	2 x 1200mm, 12W LED	

Dimensions†

	External	Internal	Packed
Width (mm)	1380	1250	1420
Depth (mm)	855	725	900
Height (mm)	1955 (castors)	1370	2000
Weight (kg)	191		211
Gross Volume (L)	1242		
Net Volume (L)	794.2		
Footprint (m^2)	1.19		

Ventilation (mm)

Top	300	**Sides**	0	**Rear**	0

Performance

Product Temperature Range (°C)	1-4°C (adjustable with SKOPE-connect™ -2°C to 15°C)
Maximum Ambient Temperature (°C)	40
Sound Power Level (dB(A))	65.7

Greenhouse and Energy Minimum Standards (GEMS)

Star Rating	3
Product Temperature Class	M1
Total Energy Consumption	3.91 kWh/24 h
Annual Running Costs	$428 (@ $0.30/kWh)

Electrical

Supply	220-240 volts a.c., 50 Hz, Single phase supply
Cord	2,700 mm power cord with 3-Pin, 10 amp plug
Current Draw (A)	1.7

Refrigeration

Controller	SCS Connect			
System Type	Removable Cartridge			
Cartridge Weight (kg)	21			
Refrigerant/Charge	R290/96 g			
Nominal Capacity (W)	547			
Heat Rejection (W)	Average	163	Peak	205
Defrost Type	Automatic, electric			
Drainage	No plumbing required			

Dimensional Tolerances

† Allow for dimensional tolerances when installing the cabinet(s).

Linear dimensions	Single cabinet	Multiple cabinets	
		At each joint	At each end wall
Less than 1 metre	±5 mm	±5 mm	+15 mm
More than 1 metre	-5 mm to +10 mm	-5 mm to +10 mm	+15 mm

* Accessible via the free SKOPE-connect™ app.

RF8.UPR.2.SD
on the SKOPE website

© 2026 SKOPE Industries Limited | We reserve the right to alter specifications without notice.

Email: skope@skope.com AUS Freephone: 1800 121 535 NZ Freephone: 0800 947 5673

skope.com