

Pass Through Range

simple · robust
CLASSEQ

The power of simple.

Driving innovation.



01

Easy selection.

Only two basic models, optionally with integrated **steam recovery (SR)**.

02

Easy installation.

Installed and commissioned in just a few minutes. The SR module is already largely pre-assembled.

03

Easy to use.

Press "on", close the hood, wash.

04

Easy cleaning.


Wash arm and filters can be removed with one hand. Self-cleaning programme included.

05

Easy maintenance.

Lower service costs thanks to simple maintenance and error diagnosis via app.

CP500

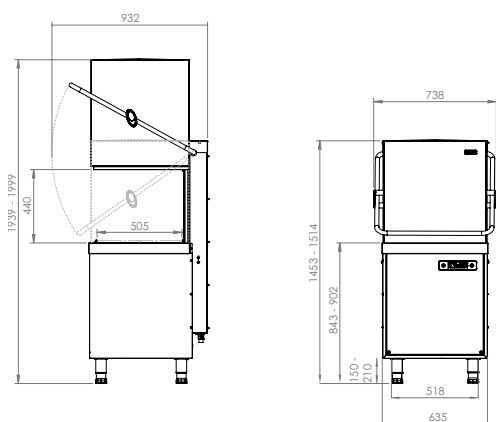


Hydraulics

	CP500	CP500 SR
Water supply connection	G3/4"	G3/4"
Required water pressure min/max	2-6 bar	1-6 bar
Incoming Water temperature min/max	20-55°C	35°C
Flow rate	4 l/min	4 l/min
Drain size Ø	40mm	40mm
Waste height	700 mm	700 mm

Electrical

Amps required - standard	15 A (3 Phase)	20 A (3 Phase)
Amps required - optional	15 / 30 A (1 Phase)	30 A (1 Phase)
Standard operating voltage	380-415V/3N~/50HZ	380-415V/3N~/50HZ
Total connected load	6.6 kW	9.6 kW

CP500 SR

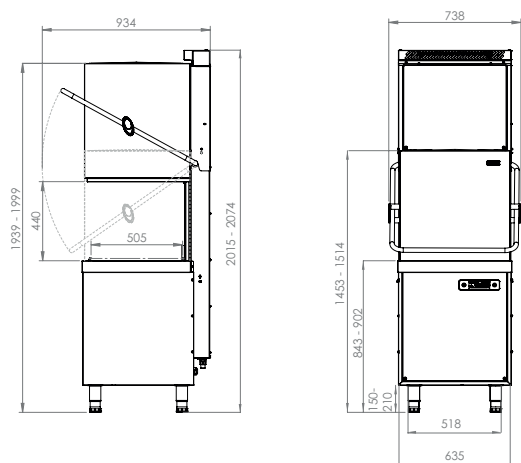

Performance

Wash tank capacity	28 L	28 L
Clear entry height	440 mm	440 mm
Water consumption per cycle* Dish	3 L / 3,8 L	3 L / 3,8 L
Cycle times Glass	1.5 / 2	1.5 / 2
Cycle times Dish / Utensil	1.5 / 3 / 5 / 7	1.5 / 3 / 5 / 7
Theoretical max. racks per hour Dish / Utensil	40 / 20 / 12 / 8	40 / 20 / 12 / 8
Wash temperature Dish / Utensil	60°C / 62°C	60°C / 62°C
Rinse temperature Dish / Utensil	82°C / 85°C	82°C / 85°C

Product Code

CP500 - 3 Ph	953V0005
CP500 SR - 3 Ph	953V0125

* All dimensions in mm

simple • robust
CLASSEQ



Tel. +61 2 9645 3221 | info@classeq.com.au | www.classeq.com.au



Scan for more information.