

## Modular Cooking Range Line EVO700 4-Hot Plates Electric Boiling Top Range

ITEM # \_\_\_\_\_

MODEL # \_\_\_\_\_

NAME # \_\_\_\_\_

SIS # \_\_\_\_\_

AIA # \_\_\_\_\_



372015 (Z7ECEH4R00) 4-hot plate (2,6 kW each)  
electric boiling top

372127 (Z7ECEH4R0N) 4-hot plate (2,6 kW each)  
electric boiling top

### Short Form Specification

Item No. \_\_\_\_\_

To be installed on open base installations, bridging supports or cantilever systems. Four 2.6 kW cast-iron hot plates hermetically sealed to the one-piece top. Exterior panels in stainless steel with Scotch Brite finish. One piece pressed work top in 1.5 mm thick stainless steel. Right-angled side edges to allow flush-fitting junction between units.

### Main Features

- Unit to be mounted on open base cupboards, bridging supports or cantilever systems.
- The four 2.6kW cast-iron plates are hermetically sealed to the one-piece top.
- The special design of the control knob system guarantees against water infiltration.
- IPx4 water protection.
- Suitable for countertop installation.


### Construction

- All exterior panels in Stainless Steel with Scotch Brite finishing.
- One piece pressed 1.5 mm work top in Stainless steel.
- Model has right-angled side edges to allow flush fitting joints between units, eliminating gaps and possible dirt traps.

APPROVAL: \_\_\_\_\_

### Optional Accessories

- |  |            |                          |
|--|------------|--------------------------|
| • Junction sealing kit   | PNC 206086 | <input type="checkbox"/> |
| • Support for bridge type installation, 800 mm                       | PNC 206137 | <input type="checkbox"/> |
| • Support for bridge type installation, 1000 mm                      | PNC 206138 | <input type="checkbox"/> |
| • Support for bridge type installation, 1200 mm                      | PNC 206139 | <input type="checkbox"/> |
| • Support for bridge type installation, 1400 mm                      | PNC 206140 | <input type="checkbox"/> |
| • Support for bridge type installation, 1600 mm                      | PNC 206141 | <input type="checkbox"/> |
| • Frontal handrail 800 mm  | PNC 206167 | <input type="checkbox"/> |
| • Large handrail (portioning shelf) 800 mm                           | PNC 206186 | <input type="checkbox"/> |
| • Frontal handrail 1200 mm   | PNC 206191 | <input type="checkbox"/> |
| • Frontal handrail 1600 mm   | PNC 206192 | <input type="checkbox"/> |
| • Right and left side handrails                                      | PNC 206240 | <input type="checkbox"/> |
| • Water column with swivel arm (water column extension not included) | PNC 206289 | <input type="checkbox"/> |
| • Water column extension   | PNC 206291 | <input type="checkbox"/> |
| • Chimney upstand, 800 mm  | PNC 206304 | <input type="checkbox"/> |
| • 2 side covering panels, height 250 mm, depth 700 mm                | PNC 206320 | <input type="checkbox"/> |
| • Chimney grid net, 400mm  | PNC 206400 | <input type="checkbox"/> |

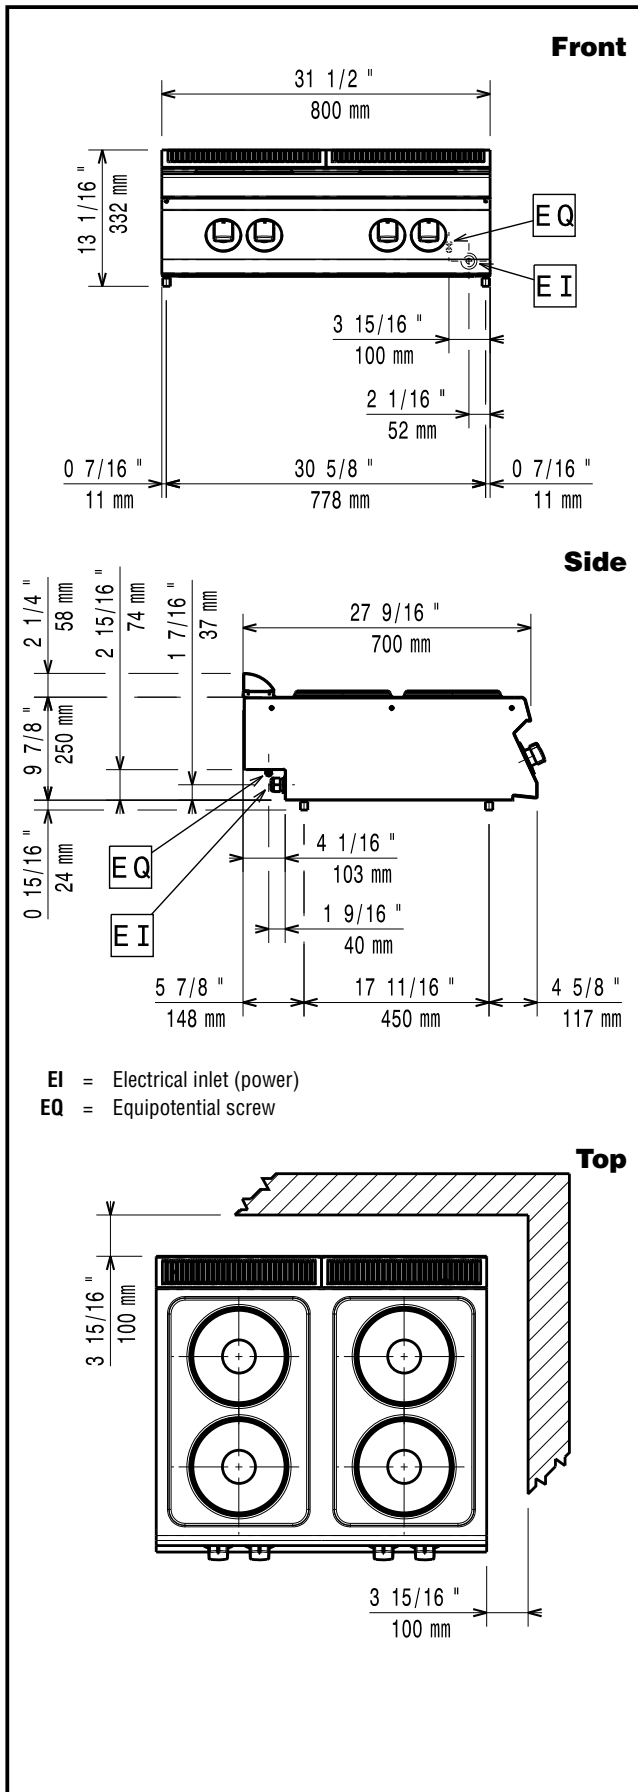

**Electric**

**Supply voltage:**

372015 (Z7ECEH4R00)	380-400 V/3 ph/50/60 Hz
372127 (Z7ECEH4R0N)	230 V/3 ph/50/60 Hz

**Total Watts:**

10.4 kW

**Predisposed for:**

372015 (Z7ECEH4R00)	380-400V 3~ 50/60Hz 9-10,4kW
---------------------	---------------------------------

**Key Information:**

<b>Front Plates Power:</b>	2.6 - 2.6 kW
<b>Back Plates Power:</b>	2.6 - 2.6 kW
<b>Front Plates dimensions:</b>	Ø 230 Ø 230
<b>Back Plates dimensions:</b>	Ø 230 Ø 230
<b>Net weight:</b>	40 kg
<b>Shipping weight:</b>	38 kg
<b>Shipping height:</b>	
372015 (Z7ECEH4R00)	530 mm
372127 (Z7ECEH4R0N)	540 mm
<b>Shipping width:</b>	820 mm
<b>Shipping depth:</b>	860 mm
<b>Shipping volume:</b>	
372015 (Z7ECEH4R00)	0.37 m <sup>3</sup>
372127 (Z7ECEH4R0N)	0.38 m <sup>3</sup>
<b>Certification group:</b>	
372015 (Z7ECEH4R00)	EH74T
372127 (Z7ECEH4R0N)	N7CE1

If appliance is set up or next to or against temperature sensitive furniture or similar, a safety gap of approximately 150 mm should be maintained or some form of heat insulation fitted.