

One Door Glass Chiller

Range: BackBar

SKOPE ID: GC001

Dimensions: 970 mm (W) × 590 mm (D) × 870 mm (H)*

Capacity: 152 L

* Height with legs is adjustable from 855 to 890.

Project: _____

Item #: _____



A 1-door under-bar glass chiller designed to keep your bar glasses cool and easily accessible to service staff in busy bars, clubs, and hotels. With a sleek aesthetic, including frameless glass doors, you can create an integrated look for all under-counter glass door bar refrigeration alongside SKOPE's BackBar range. The body is made from powder-coated, galvanised steel with colour options; it can also be upgraded to full stainless steel construction. The cabinet features wire shelving that can accommodate glass racks at either 355 mm × 430 mm, or 430 mm × 430 mm, for keeping your glasses chilled. The glass doors are designed for condensation protection in standard operating environments via the double-glazed, argon-filled, low-e, insulated panels. The glass chiller uses R290 natural refrigerant for ultra-low energy consumption, low heat discharge and low noise output, with a remote version also available. The slim side-mounted and front-breathing refrigeration system wastes the absolute minimum of your precious floor space, while the fully removable refrigeration cartridge can be removed in line with best practice for safe servicing of flammable refrigerants. The fridge is certified to all Australian and New Zealand refrigeration and electrical safety standards.



Warranty



Natural Refrigerant

© 2022 SKOPE Industries Limited | We reserve the right to alter specifications without notice.


Email: skope@skope.com

AUS Freephone: 1800 121 535

NZ Freephone: 0800 947 5673

skope.com



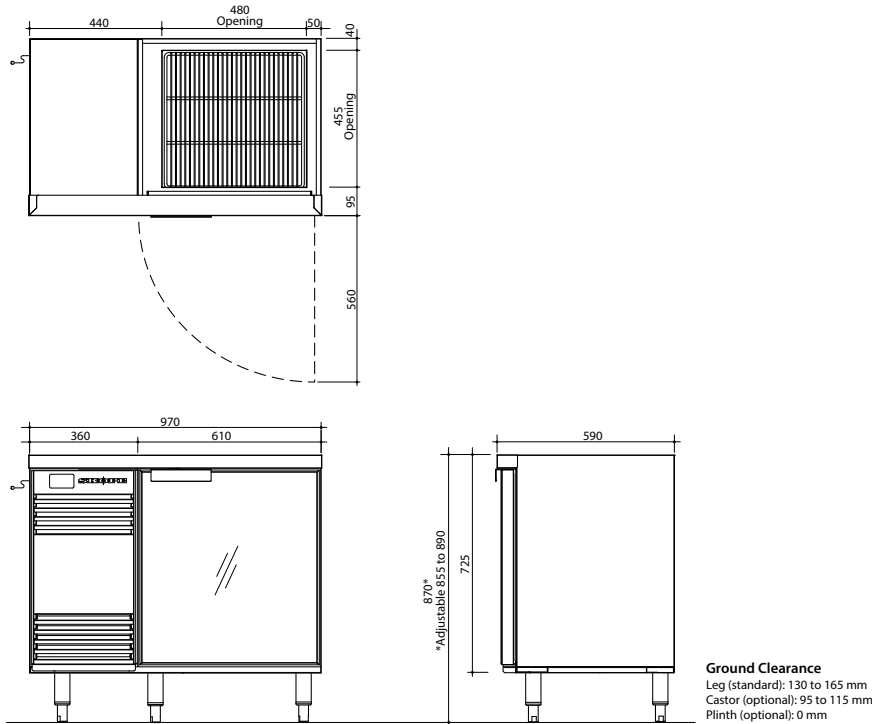

Ground Clearance
 Leg (standard): 130 to 165 mm
 Castor (optional): 95 to 115 mm
 Plinth (optional): 0 mm

Cabinet

Type	Glass Chiller		
Finish	Powdercoated galvanised steel or stainless steel		
Insulation	Type	PU foam	
	Thickness (mm)	50	
	Blowing Agent	Cyclo-iso pentane (C5H10/C5H12)	
Doors	Type	Glass swing door (double-glazed, low-e, argon-filled)	
	Opening Size	Height (mm)	565
		Width (mm)	470
Top Opening	Depth (mm)	455	
	Width (mm)	480	
	Three plastic-coated wire shelves		
Shelving	2 x adjustable height shelf (465W x 455D), 1 x fixed bottom shelf (465W x 455D)		
Lighting	Sign	n.a.	
	Interior	n.a.	
Night Lid	Perspex		

Dimensions†

	External	Internal	Packed
Width (mm)	970	480	TBC
Depth (mm)	590	485	TBC
855 to 890 (standard legs)			
Height (mm)	725 (plinth)	655	TBC
	820 to 840 (castors)		
Weight (kg)	130		TBC
Capacity (L)	152		
Footprint (m²)	0.57		

Performance

Temperature Range (°C)	1 to 4		
Maximum Ambient Temperature (°C)	40		
Sound Level (dB(A))	Standard	<66	

Ventilation (mm)

Top	Not required	Sides	Not required	Rear	Not required
-----	--------------	-------	--------------	------	--------------

Electrical

Supply	220-240 volts a.c., 50 Hz, single phase supply		
Cord	1.9 m power cord with 3-pin, 10 amp plug		
Current draw (A)	2.6		

Refrigeration

Controller	SCS Connect		
System Type	Removable cartridge		
Cartridge Weight (kg)	24		
Refrigerant/Charge	R290/81 g		
Nominal Capacity (W)	550 (EN12900 MBP)		
Heat Rejection (W)	Average 55	Peak	80
Defrost Type	Automatic, off-cycle		
Drainage	No plumbing required		

Dimensional Tolerances

† Allow for dimensional tolerances when installing the cabinet(s).

Linear dimensions	Single cabinet		Multiple cabinets	
			At each joint	At each end wall
Less than 1 metre	±5 mm	±5 mm	+15 mm	
More than 1 metre	-5 mm to +10 mm	-5 mm to +10 mm	+15 mm	



GC.1.GSW
on the SKOPE website

