





PRODUCT FEATURES

- Individual premium crescent cube with no ice bridging.
- Exceptionally hard crystal clear cubes that melt slowly.
- Durable stainless steel exterior.
- Slide in air filter at front for easy cleaning - maintaining performance efficiency.
- Double-sided stainless steel evaporator for all water conditions - produces more ice in less cycles.
- Flush mount to rear wall.
- Good in hard water areas.
- Snap in water tank design - easy to remove for sanitization.
- Low electrical consumption.
- Low water consumption.
- 3 year parts and labour warranty on entire unit.

CUBE SIZE:



TECHNICAL DRAWING

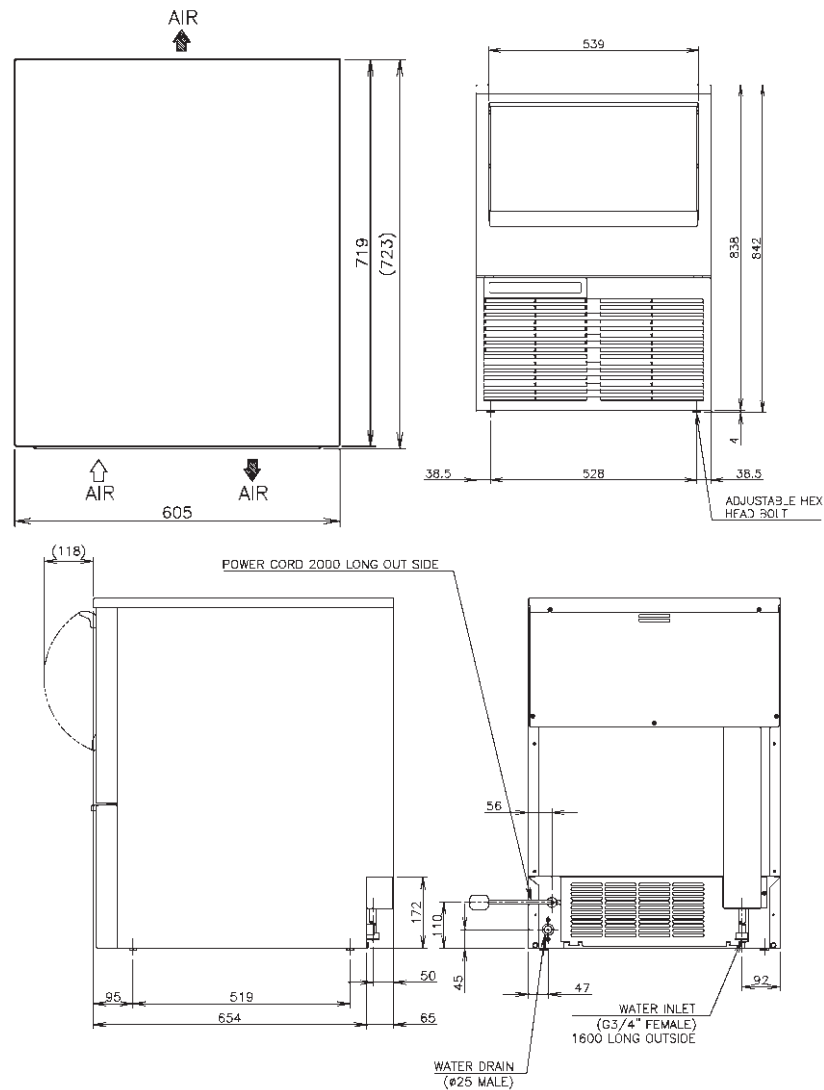

PRODUCT SPECIFICATION

Production Capacity per 24hours	Approx. 79kg @10°C Air temp; 10°C Water Approx. 74kg @ 21°C Air temp; 15°C Water Approx. 57kg @ 32°C Air temp; 21°C Water
Max Storage Capacity	Approx. 40kg (Bin Cont Setting Approx. 34kg)
Freeze Cycle Time	Approx. 23 Min
Ice Production Per cycle	Approx. 1.25kg/130pcs
Dimensions	605mm (W) x 719mm (D) x 842mm (H) (Adjustable legs are optional)
Cooling	Air
Weight Net/Gross (kg)	51 / 64
AC Supply Voltage	1 PHASE 220-240V 50Hz /10amp Plug
Amperage	Running: 2.9A Starting: 13.3A
Refrigerant Charge	R134a / 240g
Operating Conditions	Ambient Temp.: 1-40°C Water Supply Temp.: 5-35°C Water Supply Pressure: 0.07-0.8MPa (0.7-8bar) Voltage Range: ± 6%



Descriptions and specifications are subject to change at any time, without notice. Illustrations for demonstration purposes.

Copyright © 2020 Hoshizaki Lancer Pty Ltd. All right reserved. E&OE Date: Sept 2020