DYNAMIC PREPARATION



POTATO PEELER PI-30 230/50/1

Stainless steel construction commercial potato peeler. 30 Kg. / 66 pounds load per cycle.

P/N 1000631



SALES DESCRIPTION

Not only to peel potatoes, but also suitable to peel carrots and other similar products.

High capacity and production owing to lateral stirrers covered with silicon carbide abrasive (approved by NSF). Aluminium base plate lined with silicon carbide abrasive (approved by NSF). Construction in stainless steel.

- ✓ Auto-drag of waste to the drain.
- ✓ Energy efficiency thanks to engine optimisation.
- Liftable transparent polycarbonate cover, complete with locking and safety device.
- \checkmark Aluminium door with hermetic seal and safety device.
- Waterproof control board (IP65): Improved reliability against moisture and water splash.
- √ Water inlet system with non-return air break.
- ✓ Auxiliary contact for external electric valve.
- ✓ 0-6min timer and possibility of continuous operation.

Accessories

Stands for potato peelers

☐ Filters for potato peelers







Polígono Basarte, 1. 20720 Azkoitia, Spain phone +34 943 15 72 36 sales@sammic.com



Project	Date
Item	Qty

Approved

POTATO PEELER PI-30 230/50/1

Stainless steel construction commercial potato peeler. 30 Kg. / 66 pounds load per cycle.

P/N 1000631

SPECIFICATIONS

Hourly production: 600 Kg / 720 Kg Capacity per load: 30 Kg Timer (min-max): 0 ' - 6 ' Total loading: 730 W Electrical supply: 230 V / 50 Hz / 1 ~ (4.6 A)

External dimensions (WxDxH)

- √ Width: 622 mm
- ✓ Depth: 760 mm
- ✓ Height: 1002 mm


External dimensions with stand


- √ Width with stand: 546 mm
- ✓ Depth with stand: 760 mm
- √ Height with stand: 1255 mm

Net weight: 61 Kg

Crated dimensions

670 x 835 x 1180 mm Gross weight: 71.3 Kg.

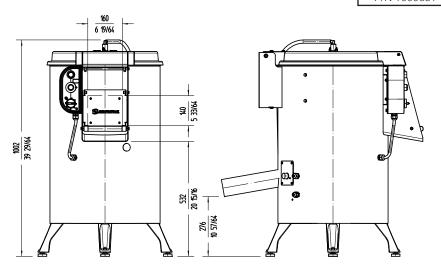





Polígono Basarte, 1. 20720 Azkoitia, Spain phone +34 943 15 72 36 sales@sammic.com



Project	Date
Item	Qty