


Top Mount, 1 Glass Door, Upright Fridge

Range: EziCore
SKOPE ID: ET65BYN
Dimensions: 740 mm (W) × 750 mm (D) × 2210 mm (H)
Capacity: 557 L

Project: _____

Item #: _____

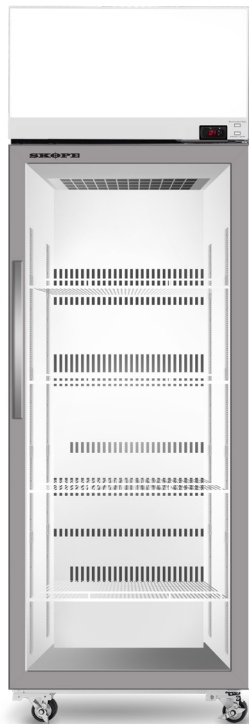

A high-efficiency, top-mounted, one glass door display fridge designed to display and store ready-to-serve chilled food and drinks. It is suitable for a range of front of house applications such as bars, restaurants, clubs, pubs, cafés, convenience stores, supermarkets, and quick service restaurants. The fridge is engineered to serve cold drinks at 0°C to 5°C in ambient environments of up to 35°C and is GEMS-compliant, as well as food-safe with 3M1 climate class. It is made from white powder-coated, galvanised steel, and you can customise the lit sign panel with your own branding. The double-glazed door helps prevent condensation and includes built-in LED lights in the door frame to ensure excellent merchandising of your products. The self-contained fridge uses R290 natural refrigerant for ultra-low energy consumption, low heat discharge and low noise output. The top-mounted refrigeration cartridge can be removed in line with best practice for safe servicing of flammable refrigerants. The fridge is certified to all Australian and New Zealand refrigeration and electrical safety standards.



Warranty



Natural Refrigerant



GEMS



© 2022 SKOPE Industries Limited | We reserve the right to alter specifications without notice.


Email: skope@skope.com

AUS Freephone: 1800 121 535

NZ Freephone: 0800 947 5673

skope.com

PSS1039 | Rev. 1.4 | Apr. 2025

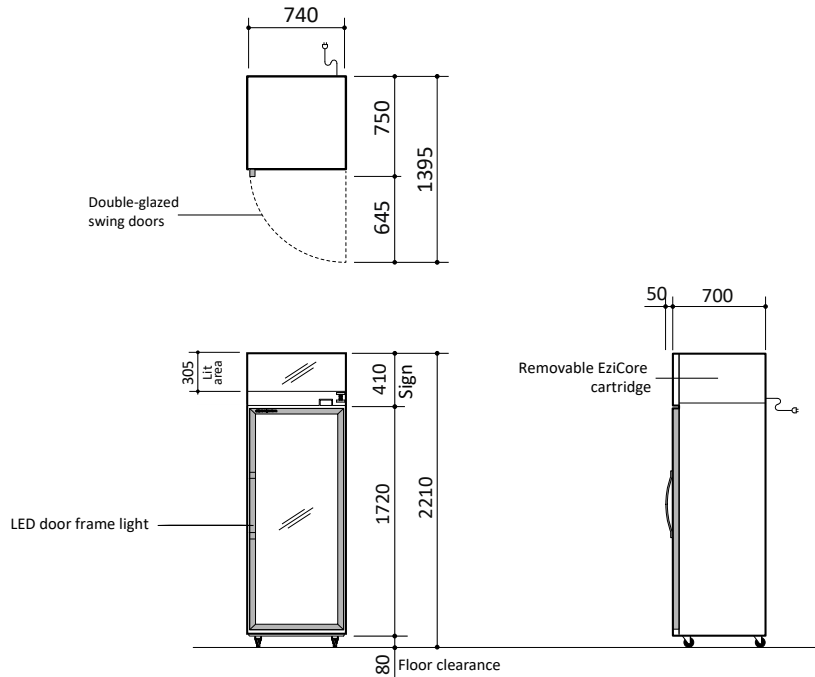

Cabinet

Type	TCE Fridge		
Finish	Powder-coated galvanised steel		
Insulation	Type	PU foam	
	Thickness (mm)	50	
	Blowing Agent	Cyclo-iso pentane (C5H10/C5H12)	
Doors	Type	Glass swing door (double-glazed, argon-filled, toughened safety glass)	
	Opening Size	Height (mm)	1570
		Width (mm)	645
Shelving	Four adjustable height plastic-coated wire shelves 4 x full width shelf (620W x 460D)		
Lighting	Sign	1 x 3 W, 490 mm LED	
	Interior	2 x 6 W, 1360 mm LED in door frame	

Dimensions†

	External	Internal	Packed
Width (mm)	740	640	755
Depth (mm)	750	554	775
Height (mm)	2210 (castors)	1570	2210
Weight (kg)	136.6		139.6
Capacity (L)	557		
Footprint (m²)	0.56		

Ventilation (mm)

Top	300	Sides	Not required	Rear	Not required
-----	-----	-------	--------------	------	--------------

Performance

Product Temperature Range (°C)	0 to +5	
Maximum Ambient Temperature (°C)	35	
Sound Level (dB(A))	Standard	<65

Greenhouse and Energy Minimum Standards (GEMS)

Star Rating	8	
Product Temperature Class	M1 (-1 to 5°C)	
Total Energy Consumption	3.15 kWh/24 h	
Annual Running Costs	\$345 (@ \$0.30/kWh)	

Electrical

Supply	220 to 240 volts a.c., 50 Hz, single phase supply	
Cord	TBC m power cord with 3-pin, 10 amp plug	
Current draw (A)	3.0	

Refrigeration

Controller	Electronic – adjustable		
System Type	Removable cartridge		
Cartridge Weight (kg)	25.6		
Refrigerant/Charge	R290/84 g		
Nominal Capacity (W)	670 (EN12900 MBP)		
Heat Rejection (W)	Average	130	Peak 150
Defrost Type	Automatic, off-cycle		
Drainage	No plumbing required		

Dimensional Tolerances

† Allow for dimensional tolerances when installing the cabinet(s).

Linear dimensions	Single cabinet	Multiple cabinets	
		At each joint	At each end wall
Less than 1 metre	±5 mm	±5 mm	+15 mm
More than 1 metre	-5 mm to +10 mm	-5 mm to +10 mm	+15 mm



TCE650N
on the SKOPE website