

| Client | Quantity |
|---------|----------|
| Project | Position |

Pizza Base EN60x40 counter 2 doors

Model: TZS13/1M-710 **Cod:** T40200000201



Technical data

| Тор: | Without top |
|--------------------------|---------------------------------|
| Gross capacity: | 389 lt |
| Temperature range: | -2°+8°C |
| Refrigerant unit: | Plug-In |
| Energetic class: | В |
| Energy efficiency index: | 30,1 |
| Annual consumption: | 734 kW/h annum |
| 24h consumption: | 2,011 kW/h/24h |
| Climate class: | 5 |
| Cooling gas: | R290 |
| Defrost: | Hot gas |
| Body height: | 710 mm |
| Valve: | Supplied standard with solenoid |
| Dimensions: | 1450×780×810 mm |
| Packing dimensions: | 1545×900×990 mm |
| Gross weight: | 130 Kg |
| Voltage: | 220-240 V - 50 Hz |
| Total rate: | 250 W |
| Absorbed Current: | 1,15 A |
| Cooling capacity: | 406 W* |
| *• | Evap10°C Cond. +55°C |

Features

| 8 slides EN60x40 |
|--|
| Electronic, display flush with the panel |
| 2 doors, self-closing, reversible with 105° stop |
| Magnetic, triple chamber and easily replaceable |
| 60 mm thickness - CFC/HCFC free |
| Exterior and interior AISI 304 stainless steel. |
| Rounded for easy cleaning and ensuring maximum hygiene |
| Stainless steel AISI 304, 2 mm thick |
| |
| Stainless steel AISI 304 |
| Stainless steel AISI 304 Stainless steel AISI 304, adjustable h 100-150 mm |
| |

In order to constantly offer the best possible products we reserve the right to make changes on technical specifications without incurring any obligation for equipment previously or subsequently sold.



Accessories and variants


| Drawers 1/2 | Pair of type L slides 605 mm |
|--|---|
| Drawers 1/3 | Serial interface, RS485 cable |
| Drawers 1/3 + 2/3 | Cosmo connection kit |
| Lock with key for drawer 1/2 | IP44 schuko socket with cover |
| Lock with key for drawer 1/3 | Removable plinth EN 2D h 50 mm |
| Lock with key for drawer 1/3 + 2/3 | Removable plinth EN 2D h 100 mm |
| Plug-in water unit | Removable plinth EN 2D h 150 mm |
| Power supply frequency 60Hz | |
| Other special voltage | COSMO - wi-fi control |
| 7 Neutral drawers h 710 mm | COSIMO - WI-II COILLIOI |
| 3+1 Neutral drawers h 710 mm | Cosmo is the wi-fi technology that a |
| 1+1 Neutral drawers h 710 mm | Coldline appliances. Connect Pizza |
| Granite top 1450 mm | or LEVTRONIC) and from the app y of each machine and receive alerts |
| Adjustable height of feet: 145/195 mm | |
| 4 Swivel and brake castors h 128 mm | |
| Frame fitted with telescopic EN60x40 slides | |
| EN60x40 Pizza container h 60 mm | |
| Aluminium coated backing-pan EN60x40 h 20 mm | |

| COSMO - wi-fi | control |
|---------------|---------|

Cosmo is the wi-fi technology that allow to connect and monitor all ${\sf Coldline\ appliances.\ Connect\ Pizza\ bases\ to\ a\ Cosmo\ hub\ (MODI,VISION\)}$ or LEVTRONIC) and from the app you can check the operating conditions of each machine and receive alerts in case of abnormal functioning.

*The installation requires a kit for the replacement of the racks

Technical draw

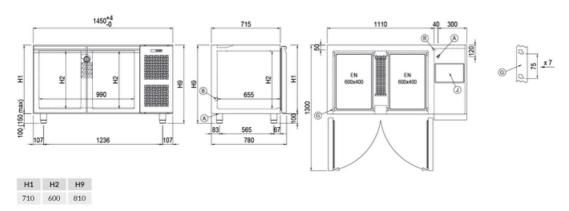

Power supply cable outlet

Condensation water drain

G: Racks pitch

Automatic evaporation of condensing water

In order to constantly offer the best possible products we reserve the right to make changes on technical specifications without incurring any obligation for equipment previously or subsequently sold.