


Digital controller & LED lights

Ensures quality of product with food safe refrigeration

Removable bays and load lines for food safety

Front lifting glass

Rear bench for food preparation

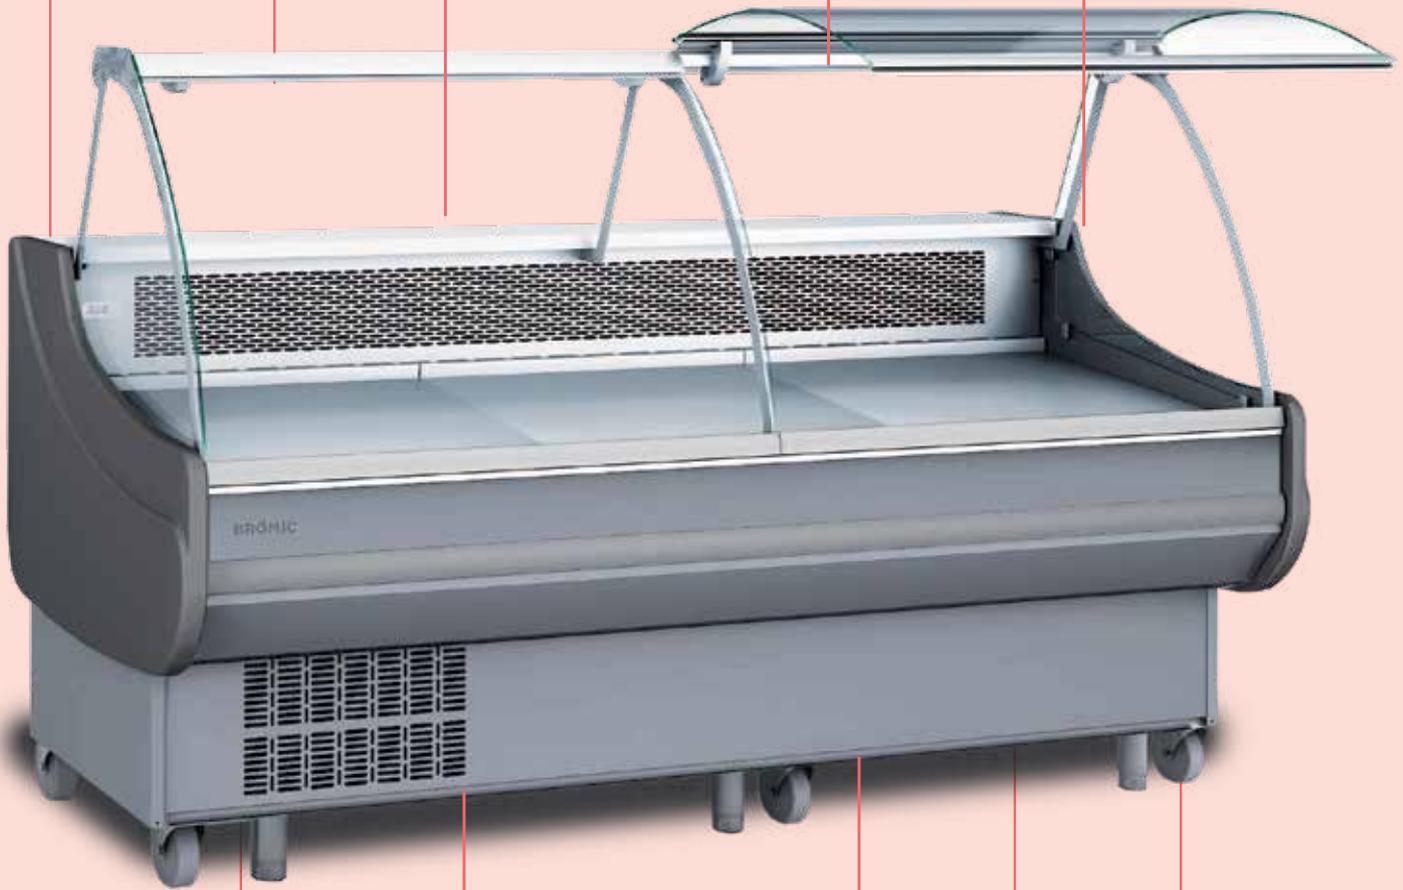

Removable front panel for easy maintenance

Flexible and mobile design for multiplexing or standalone applications

Easy installation with simple plug & play functionality

Available with castors & feet

Undercounter rear storage with hinged doors

Bromic's Professional Delicatessen Display range represents the pinnacle of plug-in serve-over displays, offering the ability to join purpose-built sections to create a seamless self-contained service area.

71. Square Glass Delicatessen Display

Bromic's Square Glass Delicatessen Displays ensure quality of product with food safe refrigeration, both in display and storage.

Available in a range of lengths, these plug-in units are both flexible and mobile for multiplexing or standalone applications. Featuring premium specifications, such as hydraulic lift-up front glass and rear refrigerated storage.



72. Curved Glass Delicatessen Display

Bromic's Curved Glass Delicatessen Displays ensure quality of product with food safe refrigeration, both in display and storage.

Available in a range of lengths, these plug-in units are both flexible and mobile for multiplexing or standalone applications. Featuring premium specifications, such as hydraulic lift-up front glass and rear refrigerated storage.



78. Specification Reference Guide


PROFESSIONAL RANGE

DELICATESSEN DISPLAYS


Square Delicatessen Displays

PROFESSIONAL RANGE


NEW

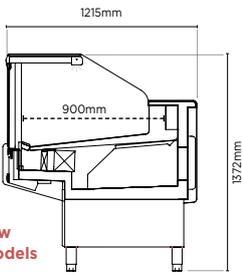


Side view of all models




DD0090SG




DD0150SG



DD0200SG

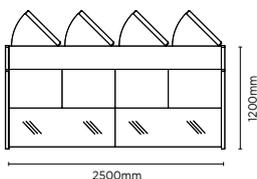

DD0250SG

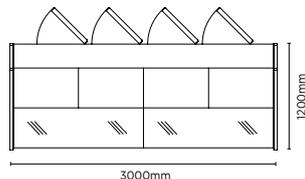

DD0300SG

1 YEAR
Warranty
LABOUR
& PARTS

Square Glass Delicatessen Display

- Ensure quality of product with food safe refrigeration, both on display and storage
- Flexible and mobile design allows multiplexing or standalone applications
- Easy cleaning and maintenance with removable bays and front panels
- Plug and play functionality using 10amp power

DD0150SG

Part No. 3335611 Display Area 1.41 m²

	Ext (mm)	Weight
Width	1500	209kg
Depth	1215	
Height	1372	

DD0200SG

Part No. 3335610 Display Area 1.88 m²

	Ext (mm)	Weight
Width	2000	235kg
Depth	1215	
Height	1372	

DD0250SG

Part No. 3335612 Display Area 2.34 m²

	Ext (mm)	Weight
Width	2500	270kg
Depth	1215	
Height	1372	

DD0300SG

Part No. 3335613 Display Area 2.78 m²

	Ext (mm)	Weight
Width	3000	373kg
Depth	1215	
Height	1372	


DD0090SG

Part No. 3335614 Display Area 1.04 m²

	Ext (mm)	Weight
Width	2202	286kg
Depth	1215	
Height	1372	

Curved Delicatessen Displays

PROFESSIONAL RANGE

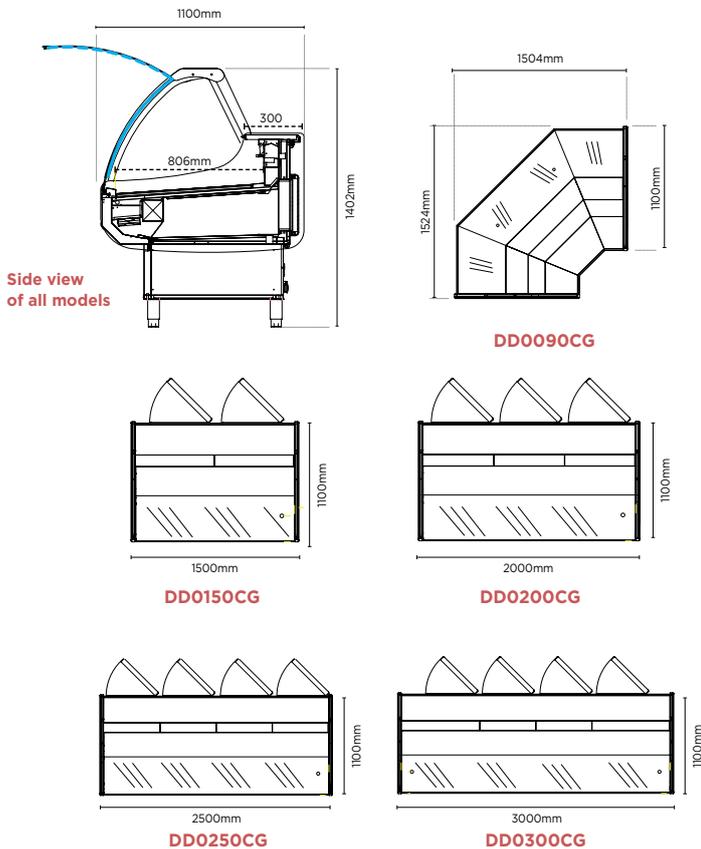

1 YEAR
Warranty
LABOUR
& PARTS

Curved Glass Delicatessen Display

- Ensure quality of product with food safe refrigeration, both on display and storage
- Flexible and mobile design allows multiplexing or standalone applications
- Easy cleaning and maintenance with removable bays and front panels
- Plug and play functionality using 10amp power

DD0150CG

Part No. 3335615 Display Area 1.17 m²

	Ext (mm)	Weight
Width	1500	187kg
Depth	1100	
Height	1402	

DD0200CG

Part No. 3335616 Display Area 1.58 m²

	Ext (mm)	Weight
Width	2000	210kg
Depth	1100	
Height	1402	

DD0250CG

Part No. 3335617 Display Area 1.99 m²

	Ext (mm)	Weight
Width	2500	241kg
Depth	1100	
Height	1402	

DD0300CG

Part No. 3335613 Display Area 2.37 m²

	Ext (mm)	Weight
Width	3000	333kg
Depth	1100	
Height	1402	

DD0090CG

Part No. 3335619 Display Area 1.30 m²

	Ext (mm)	Weight
Width	2144	286 kg
Depth	1100	
Height	1402	



Precise Dixell digital temperature controller for accurate temperature maintenance

Stylish curved glass maximises visual impact

Refrigerated rear storage keeps stock on hand during busy periods

Integrated rear bench provides a practical

High-impact LED lighting maximises product visibility and captures attention

Hydraulic lift-up front glass for simple cleaning and stocking

Plug-in power supply allows installation anywhere with a 10A outlet

Lockable castors & removable feet make movement & placement easy

Durable stainless steel internal finish for food safety and durability

Multiplexable design enables seamless connection



Bromic's Signature Delicatessen Display range represents the pinnacle of plug-in serve-over displays, offering the ability to join purpose-built sections to create a seamless self-contained service area.



75. Delicatessen Displays

Bromic's Delicatessen Displays are produced in Europe by custom-display experts Jordao, tailoring uniquely European display solutions to offer superior performance in Australia's challenging climate.

Available in a range of lengths, these plug-in units create the perfect standalone serve-over display and feature premium specifications, such as hydraulic lift-up front glass and rear refrigerated storage.



A water bath is heated below to provide moisture while hydraulic lift-up glass at the unit's front and sliding doors at the rear allow access from either side.



75. Optional Extras

Delicatessen Display Glass Mid-Shelf Kit*

Bromic's Delicatessen Display Glass Mid-Shelf Kit allows the installation of a second display tier, increasing product facings by increasing useable vertical space:

increasing useable vertical space:

- DD0150P LED (350400014)
- DD0200PLED (350400015)
- DD0250P LED (350400016)
- DD0290P LED (350400017)

Delicatessen Display Multiplexing Kits*

Bromic's Delicatessen Display Multiplexing Kits (3335050) allow units within the same range to be joined, creating a single seamless serve-over display.

Delicatessen Display Corner Units*

Bromic's Delicatessen Display Corner Units allow unique configurations and shapes in multiplexed displays, available in refrigerated 90° DD090P (3335604) and non-refrigerated 45° DD045P (3335605) corners.

*Installation by a qualified technician is recommended to ensure correct fitment

75. Cold Sandwich/Salad Bar Displays

Bromic's Sandwich/Salad Bar Displays are produced in Europe by custom-display experts Jordao, developed to display delicate fresh produce in serve-over applications.

Hydraulic lift-up glass at the unit's front and rear sliding doors allows access from either side while refrigerated rear storage keeps fresh stock on-hand during busy periods.




75. Hot Bain-Marie Displays

Bromic's Bain-Marie Displays are produced in Europe by custom-display experts Jordao, purpose-designed to provide high-humidity heat that perfectly preserves hot food in both over- and self-service applications.


77. Specification Reference Guide

Delicatessen Displays


PROFESSIONAL RANGE

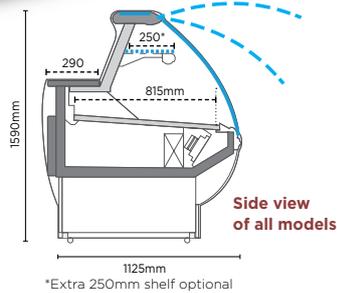

Side view of all models



DD090P
(Refrigerated)



DD045P
(Non refrigerated)

SPECIAL ORDER ONLY



Delicatessen Display

- Units supplied with stainless steel internal finish and hydraulic lift-up glass
- Rear work bench and refrigerated rear storage creates a standalone workspace
- 4 straight sizes available and 2 corner options (*45° and 90°) to suit any configuration
- Temperature range: 0 to +10°C

DD0150P LED

Part No.	Display Area
3335600	1.15 m ²

	Ext (mm)	Weight
Width	1500	273kg
Depth	1125	
Height	1590	

DD0200P LED

Part No.	Display Area
3335601	1.56 m ²

	Ext (mm)	Weight
Width	2000	325kg
Depth	1125	
Height	1590	

DD0250P LED

Part No.	Display Area
3335602	1.97 m ²

	Ext (mm)	Weight
Width	2500	380kg
Depth	1125	
Height	1590	

DD0290P LED

Part No.	Display Area
3335603	2.3 m ²

	Ext (mm)	Weight
Width	2900	422kg
Depth	1125	
Height	1590	

DD090P LED

Part No.	Display Area
3335604	0.96 m ²

	Ext (mm)	Weight
Width	1275	200kg
Depth	1090	
Height	1590	

DD045P LED



Part No.	Display Area
3335605	0.48m ²

	Ext (mm)	Weight
Width	900	150kg
Depth	1090	
Height	1590	

*DD045P requires multiplexing in order to be refrigerated.



Gastronom Layout Chart

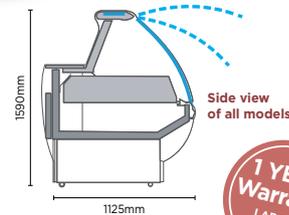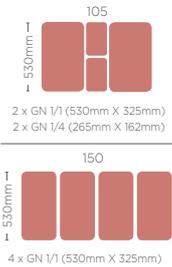

Side view of all models



SPECIAL ORDER ONLY

Sandwich/Salad Bar

- Units supplied with stainless steel internal finish and hydraulic lift-up glass
- Rear work bench and refrigerated rear storage creates a standalone workspace
- Multiplexable with delicatessen displays

SB105P

Part No.	Display Area
3335018	1.15m ²

	Ext (mm)	Weight
Width	1050	115kg
Depth	1125	
Height	1590	


SB150P

Part No.	Display Area
3335023	1.56m ²

	Ext (mm)	Weight
Width	1500	125kg
Depth	1125	
Height	1590	



Gastronom Layout Chart

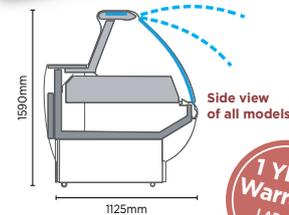

Side view of all models



SPECIAL ORDER ONLY

Hot Bain Marie

- Units supplied with stainless steel internal finish and hydraulic lift-up glass
- Rear work bench creates a standalone workspace
- Multiplexable with delicatessen displays
- Water Wells included to allow moisture to prevent contained product from drying out.

BM105P

Part No.	Display Area
3335745	1.97m ²

	Ext (mm)	Weight
Width	1050	85kg
Depth	1125	
Height	1590	

BM150P

Part No.	Display Area
3335760	1.56m ²

	Ext (mm)	Weight
Width	1500	138kg
Depth	1125	
Height	1590	

Delicatessen Displays



“Bromic delicatessen displays will let your customers view your stock easily while keeping it cool and fresh.”

Delicatessen Displays

Specification Reference Guide

Model	SPECIAL ORDER ONLY									
	DD0150P LED	DD0200P LED	DD0250P LED	DD0290P LED	DD090P LED	DD045P LED	SB105P	SB150P	BM105P	BM150P
Part Number	3335600	3335601	3335602	3335603	3335604	3335605	3335018	3335023	3335745	3335760
Ext. Width (mm)*	1500	2000	2500	2900	Refer to diagram	Refer to diagram	1050	1500	1050	1500
Ext. Depth (mm)*	1125	1125	1125	1125	1590	1590	1125	1125	1125	1125
Ext. Height (mm)*	1590	1590	1590	1590	1590	1590	1590	1590	1590	1590
Internal Tray Width*	815mm	815mm	815mm	815mm	815mm	815mm	815mm	815mm	815mm	815mm
Temp. Range	0 to +10°C	0 to +10°C	0 to +10°C	0 to +10°C	0 to +10°C		+1 to +3°C	+1 to +3°C		
Max. Ambient Temp.	32°C	32°C	32°C	32°C	32°C		32°C	32°C		
Refrigeration Power	709W	1160W	1374W	1650W	709W		709W	1160W	1374W	1160W
Gross Weight	273kg	325kg	380kg	422kg	200kg	150kg	115kg	125kg	85kg	138kg
Refrigerant	R404a	R404a	R404a	R404a	R404a		R404a	R404a		
Plug Supplied	1	1	1	1	1	1	1	1	1	1
Power Supply	10A	10A	10A	10A	10A	10A	10A	10A	10A	10A
Features										
Total Display Area	1.15 m ²	1.56 m ²	1.97 m ²	2.3 m ²	0.96 m ²	0.48m ²	1.15 m ²	1.56 m ²	1.97 m ²	1.56 m ²
Main Light	LED	LED	LED	LED	LED	LED	LED	LED	LED	LED
Storage Door Types	2 Rear Hinged	3 Rear Hinged	4 Rear Hinged	4 Rear Hinged			1 Rear Hinged	2 Rear Hinged	1 Rear Hinged	2 Rear Hinged
Hydraulic Lift Up System	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Digital Temp. Controller	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Feet and Castors	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Rear Storage	✓	✓	✓	✓			✓	✓		
Colour	Silver	Silver	Silver	Silver	Silver	Silver	Silver	Silver	Silver	Silver
Warranty										
Parts (Years)	1	1	1	1	1	1	1	1	1	1
Labour (Years)	1	1	1	1	1	1	1	1	1	1

Delicatessen Displays

Specification Reference Guide

Model	DD0150SG	DD0200SG	DD0250SG	DD0300SG	DD0090SG	DD0150CG	DD0200CG	DD0250CG	DD0300CG	DD0090CG
Part Number	3335611	3335610	3335612	3335613	3335614	3335615	3335616	3335617	3335618	3335619
Ext. Width (mm)*	1500	2000	2500	3000	2202	1500	2000	2500	3000	2144
Ext. Depth (mm)*	1215	1215	1215	1215	1215	1100	1100	1100	1100	1100
Ext. Height (mm)*	1372	1372	1372	1372	1372	1402	1402	1402	1402	1402
Internal Tray Width*	815mm									
Temp. Range	0°C to 5°C									
Max. Ambient Temp.	32°C									
Refrigeration Power	1315W	1497W	2617W	2617W	1315W	1096W	1315W	1497W	1497W	1096W
Gross Weight	209kg	235kg	270kg	373kg	286kg	187kg	210kg	241kg	333kg	286kg
Refrigerant	R404a									
Plug Supplied	1	1	1	1	1	1	1	1	1	1
Power Supply	10A									
Features										
Total Display Area	1.41 m ²	1.88 m ²	2.34 m ²	2.78 m ²	1.04 m ²	1.17 m ²	1.58 m ²	1.99 m ²	2.37 m ²	1.30 m ²
Main Light	LED									
Storage Door Types	2 Rear Hinged	3 Rear Hinged	4 Rear Hinged	4 Rear Hinged		2 Rear Hinged	3 Rear Hinged	4 Rear Hinged	4 Rear Hinged	
Hydraulic Lift Up System	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Digital Temp. Controller	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Feet and Castors	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Rear Storage	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Colour	Silver									
Warranty										
Parts (Years)	1	1	1	1	1	1	1	1	1	1
Labour (Years)	1	1	1	1	1	1	1	1	1	1

*Dimensions exclude protrusions, Height includes castors and feet, Units exclude Gastronorm Pans and cross bars, before installing any of these units, Site assembly required