


CCC12

STANDARD FEATURES

- › FrameFree canopy that maximises fully the visibility of displayed food from all sides
- › MiniTek compact refrigeration technology built into base of cabinet. No bench cut-outs or condenser installation required and cabinet is freely moveable across benches, between benches and to new locations
- › Four food display levels: three shelves plus bottom trays; offering more extensive display area than comparable cabinets
- › Chrome wire shelving system that is height adjustable in 25mm increments and interchangeable between horizontal and tilted positions
- › CrumbCatch feature in bottom trays that collects falling crumbs and food
- › High quality European and Japanese refrigeration components
- › Designed to operate at 3 - 5°C in room environments up to 28°C
- › Fan forced air flow for even temperature distribution
- › i-frost intelligent defrost control that minimises time in defrost to better maintain consistent food temperature
- › Refrigeration optimised to provide a high humidity environment that maintains food quality for longer
- › DuraCoat system providing a protective coating over the refrigeration coil to prevent food acid corrosion
- › SureVap self-evaporating system for condensate—no drain required
- › SlimLED under-shelf LED strip lighting with 12V safety
- › Rear sliding, double-glazed doors on friction-free, low wear tracks (doors removable for cleaning)

SIDE VIEW

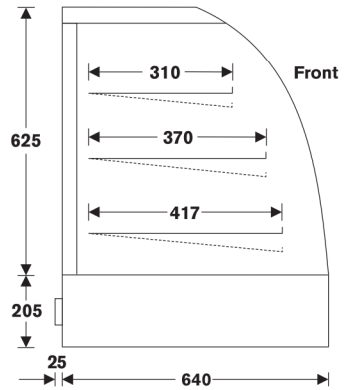

CORNWALL: CHILLED COMPACT

This innovative and unique cabinet incorporates Festivé's leading MiniTek technology to deliver the most advanced and flexible countertop on the market—simply plug in and operate.

4°C operating temperature

For Factory Options refer to page 54

For Cabinet Accessories refer to page 64

Model	CCC9	CCC12	CCC15	CCC18	CCC24
Length	900mm	1200mm	1530mm	1770mm	2370mm
Depth*	640mm	640mm	640mm	640mm	640mm
Height	830mm	830mm	830mm	830mm	830mm
Available Display Area	1.26m ²	1.73m ²	2.24m ²	2.54m ²	3.5m ²
Power Connection	10A Plug	10A Plug	10A Plug	10A Plug	10A Plug

**Add extra 25mm for protruding control panel, switches and cable exit*