


Product Information:

- This unit is designed to be mounted under a custom made bench top of your choice (manufactured & fitted by others)
- Wet or dry operation (temperature varies greatly when run dry, should not be left unattended for long periods of time)
- Temperature regulation via digital control, designed to hold product between 65°C - 90°C.
- Air insulated, double skinned tank for energy efficient heating
- Hot cupboard equipped with a fan forced heating system
- Independent controls for baine marie, hot cupboard, and gantry
- Gantry fitted with 10mm thick toughened glass and overhead Quartz IR heat lamps with adjustable temperature
- Gantry height adjustable at installation for bench top thickness
- Robust 304 grade stainless steel construction
- Manual fill and manual empty, valve operated waste
- 1/1 GN sized well, fits pans up to 150mm deep (sold separately). Pans are recessed to minimise water condensation on surrounding bench top
- Additional combinations and painted black centre section available (P.O.A), contact your Stoddart representative for more information
- **Made to Order**
- **12-month parts and labour warranty**



Specifications

Model	CH.BMHC.U.GSF.6
W x D x H (mm)	2203 x 830 x 1260
Total Connected Load	7.9kW
Electrical Connection	3Ø+N+E 400VAC / 50Hz (Onsite connection)
Water Connection	G 1/2" BSP
Waste Connection	1 1/4" BSP

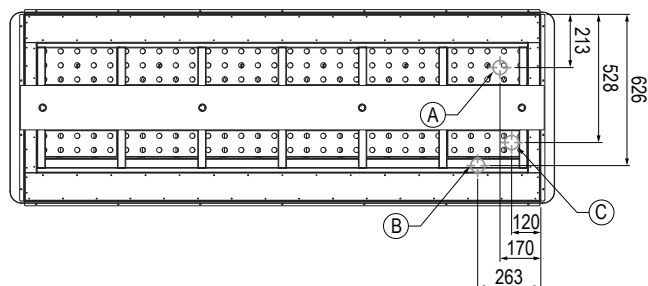

Optional Extras

Radius Well	
Add R to code after the U	CH.BMHC.UR.GSF.6
Left Hand Controls	
Add .L after the U or UR in the product code to specify left hand controls	CH.BMHC.UR.L.GSF.6

Legend

- A** Electrical Connection
- B** Water Connection
- C** Waste Connection

