


DCC12

STANDARD FEATURES

- › **GlassMax** minimalist canopy (more glass/less frame) that maximises the visibility of displayed food from all angles
- › Stainless steel top
- › **MiniTek** compact refrigeration technology built into base of cabinet. No bench cut-outs or condenser installation required and cabinet is freely moveable across benches, between benches and to new locations
- › Four food display levels: three shelves plus bottom trays; offering more extensive display area than comparable cabinets
- › Chrome wire shelving system that is height adjustable in 25mm increments and interchangeable between horizontal and tilted positions
- › **CrumbCatch** feature in bottom trays that collects falling crumbs and food
- › High quality European and Japanese refrigeration components
- › Designed to operate at 3 – 5°C in room environments up to **28°C**
- › Fan forced air flow for even temperature distribution
- › **ifrost** intelligent defrost control that minimises time in defrost to better maintain consistent food temperature
- › Refrigeration optimised to provide a high humidity environment that maintains food quality for longer
- › **DuraCoat** system providing a protective coating over the refrigeration coil to prevent food acid corrosion
- › **SureVap** self-evaporating system for condensate—no drain required
- › **SlimLED** under-shelf LED strip lighting with 12V safety
- › **ClearView** front glass for condensation control
- › Rear sliding double-glazed doors on friction-free, low wear tracks (doors removable for cleaning)

SIDE VIEW

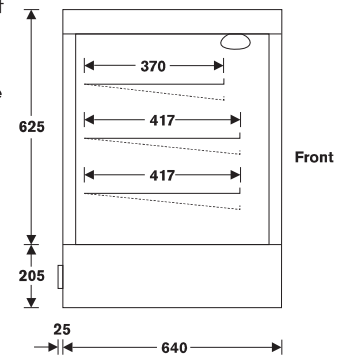

DEVON: CHILLED COMPACT

This innovative and unique cabinet incorporates Festivé’s leading MiniTek technology to deliver the most advanced and flexible countertop on the market—simply plug in and operate.

4°C operating temperature

For Factory Options refer to page 54

For Cabinet Accessories refer to page 64

Model	DCC9	DCC12	DCC15	DCC18	DCC24
Length	900mm	1200mm	1530mm	1770mm	2370mm
Depth*	640mm	640mm	640mm	640mm	640mm
Height	830mm	830mm	830mm	830mm	830mm
Available Display Area	1.35m ²	1.85m ²	2.4m ²	2.7m ²	3.7m ²
Power Connection	10A Plug	10A Plug	10A Plug	10A Plug	10A Plug

*Add extra 25mm for protruding control panel, switches, and cable exit