



**UNDERCOUNTER  
GLASS AND DISHWASHERS**



# GLASSWASHER

## ECOMAX PLUS G403



*The compact glasswasher for hotels, bars and restaurants, which are washing more than hundred glasses a day.*

### FEATURES

- Electronic control with temperature indication
- Rotating wash and rinse arms
- Negative stamped nozzles
- Incl. electric cable, supply and drain hose
- Thermostop-function for guaranteed rinse temperatures
- Integrated self-cleaning cycle
- Deep-drawn wash tank
- Double-walled housing and heat insulated front door
- Tank strainer, coarse filter and pump suction casing
- Smooth counterbalanced door
- Ready to install incl. rinse pressure pump, detergent dispenser and drain pump
- Optional base cabinet for ergonomic operation



### TECHNICAL DATA

MODEL	G403
Cycle times*	90 / 180 sec.
Capacity per hour	40 racks/h
Tank capacity	8 l
Water consumption	2,5 l/rack
Wash pump	0,6 kW
Tank heating	0,8 kW
<b>BOOSTER HEATING</b>	
Standard	2,8 kW (230 V)
Alternative	4,2 kW (400 V)
<b>TOTAL LOADING</b>	
Standard	3,2 kW (230 V)
Alternative	5,4 kW (400 V)
Rated voltage	230 / 50 / 1 (400 / 50 / 3N)
Width	460 mm
Depth	590 mm
Height	700 mm
Loading height	315 mm
Rack size	400 x 400 mm

\* with hot water connection

**plus**

# DISHWASHER ECOMAX PLUS F503



*Due to the high wash power, the double-walled housing and the robust filter systems, it is the quiet and resource-saving solution for your busy workaday life.*

## FEATURES

- Electronic control with temperature indication
- Rotating wash and rinse arms
- Negative stamped nozzles
- Incl. electric cable, supply and drain hose
- Thermostop-function for guaranteed rinse temperatures
- Integrated self-cleaning cycle
- Optional base cabinet for ergonomic operation
- Deep-drawn wash tank
- Double-walled housing and heat insulated front door
- Tank strainer, coarse filter and pump suction casing
- Smooth counterbalanced door
- Ready to install incl. rinse pressure pump, detergent dispenser and drain pump



## TECHNICAL DATA


MODEL	F503
Cycle times*	90 / 180 sec.
Capacity per hour	40 racks/h
Tank capacity	10,6 l
Water consumption	2,8 l/rack
Wash pump	0,6 kW
Tank heating	0,8 kW
<b>BOOSTER HEATING</b>	
Standard	6,2 kW (400 V)
Alternative	2,1 kW (230 V)
<b>TOTAL LOADING</b>	
Standard	7,7 kW (400 V)
Alternative	3,6 kW (230 V)
Rated voltage	400 / 50 / 3N (230 / 50 / 1)
Width	600 mm
Depth	600 mm
Height	820 mm
Loading height	425 mm
Rack size	500 x 500 mm

\* with hot water connection

**plus**


## DRAWINGS

**Model G403** Glasswasher

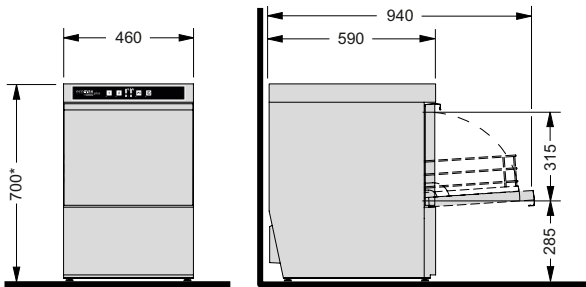

\* + 40 mm adjustable feet

**Model F503** Dishwasher

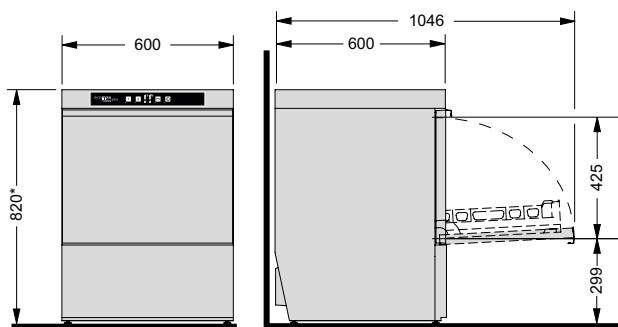

\* + 40 mm adjustable feet

\* For machine protection the water hardness should not exceed 3°dH, if higher we recommend using an integrated water softener or an external water treatment system.

\*\* For use of an external water treatment system, an integrated rinse pressure pump is necessary.

● inclusive ○ optional (pumps as retrofit kit)

## FEATURES

	GLASS-WASHER	DISHWASHER	
<b>Equipped with</b>	1 glass rack with 4 sloped rows, 1 cutlery box	1 plate rack P-18-12, 1 cutlery box	
<b>Models</b>	<b>G403-11A</b>	<b>F503-10A</b>	<b>F503S-10A</b>
Integrated water softener*	—	—	●
External water treatment system**	○	○	—
Double-walled housing	●	●	●
Deep-drawn wash tank	●	●	●
Smooth counter-balanced door	●	●	●
Tank strainer	●	●	●
Drain pump	●	●	●
Rinse pressure pump	●	●	●
Rinse dosage pump	●	●	●
Detergent dosage pump	●	●	●
HOBART Tabling programme	—	—	—
Base cabinet (435 mm high) with removable door	○	○	○