



Deluxe Glasswasher

MODEL: IW-3N

- Selectable cold rinse
- Up to 1800 Glasses per hour
- Top mounted controls minimises bending
- Integrated detergent pump
- Easy to use electro mechanical controls
- Safety Cut-out fitted to door



FEATURES

BENEFITS

SUPPLIED WITH 430 x 360MM (17" x 14") RACK, WILL ACCEPT 400 x 400MM (14" x 14") RACKS	➔	WILL ACCOMMODATE LARGE VARIETY OF GLASS RACKS
EASILY REMOVABLE SPRAY ARMS	➔	REDUCED CONTAMINATION OF WASH WATER WITH SOIL GIVES LOW DETERGENT CONSUMPTION
LOW ENERGY CONSUMPTION	➔	OPERATES FROM SINGLE PHASE 15 AMP ELECTRICAL SUPPLY
DETERGENT PUMP FITTED AS STANDARD	➔	INTEGRATED HOSE DROPS STRAIGHT INTO CHEMICALS
ALL STAINLESS STEEL CONSTRUCTION	➔	ENSURES RIGIDITY AND DURABILITY
SAFETY CUT-OUT FITTED TO DOOR	➔	ENSURES SAFE OPERATION



"The ONLY HACCP approved Warewashing made in Australia for your protection"



ESWOOD 10-6-2-1 GUARANTEE	10 YEARS GUARANTEE OF PARTS AVAILABILITY
	6 YEARS WARRANTY ON STAINLESS BODY
	2 YEARS WARRANTY ON WASH PUMP
	1 YEAR WARRANTY ON PARTS & LABOUR



1800 013 123

goldsteineswood.com.au



Deluxe Glasswasher

IW-3N (400 x 400 or 430 x 360 Racks)

Professional Power-Wash Performance:

The Eswood IW-3N incorporates a powerful wash pump and boost heater to maintain optimum wash quality and provide fast turnaround of up to 1800 glasses per hour, independent of mains water pressure fluctuations. The wash chamber has a clearance of 295mm to easily accommodate tall glasses and jugs or up to thirty 285ml glasses using a 17" x 14" basket. The IW-3N will also accommodate a variety of standard racks including 400mm x 400mm and 14" x 14".

Fully Automatic Operation:

Simple push button controls activate the fully automatic operation with either a hot cycle or a hot cycle followed by a cooling cycle. Detergent injection is pre-programmed and fully automatic. Upper and lower rotating arms with multiple jets ensure maximum wash and rinse coverage. The boost heater is thermostatically controlled and interlocked to the machine operation to ensure correct sanitising temperatures. A door safety switch prevents accidental operation.

ANZFA & Plumbing Safety Approved:



The Eswood IW-3N conforms to ANZFA requirements. The IW-3N has also received Australian Standards "Type Test Mark" Plumbing Safety Approval and is licensed for connection to portable water supplies throughout Australia. IW-3N has a water consumption of just 7 litres for an all hot cycle plus 2.5 litres if additional cooling is selected.

Easy Installation:

Height adjustable legs eliminate the need for a plinth, making installation and cleaning easier. Just connect the inlet hoses to hot and cold taps, connect the outlet to a drain and plug the cord into a 15amp, 240V power point.

Quality Stainless Steel Construction:

An easy-care stainless steel cabinet, selected long-life non-ferrous or synthetic materials for all componentry exposed to water or detergent together with Eswood's commitment to quality controlled manufacture and ongoing customer support ensures your investment provides reliable operation and excellent long term value.

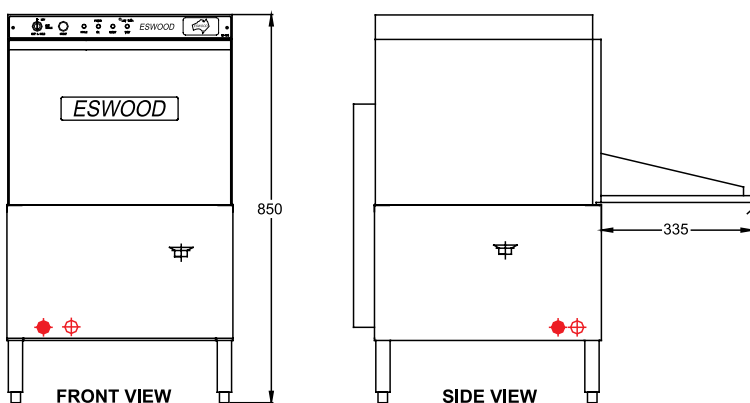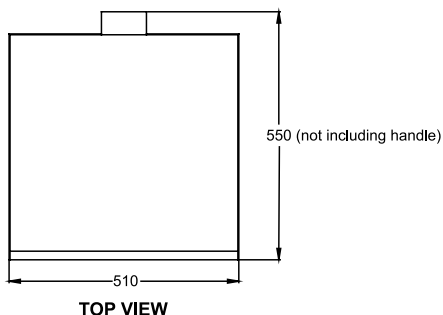

MODEL: IW3N Specifications:	
Dimensions (WxDxH):	510 x 550 x 850 mm
Depth with door open:	885 mm
Rack Size - G74N (WxD):	430 x 360 or 400 x 400 mm
Weight:	40 kg
Electric Connection:	15A Single Phase
Rating:	3 kW
Water Supply:	65°C / 1-4 bar (15-56 PSI)
Packed:	0.2 m ³
Service:	1800 glasses / hour
Wash Cycle:	25 sec Hot Cycle 45 sec Hot & Cold Cycle
Water Consumption:	7L Hot Cycle 7L Hot & 3L Cold Cycle
Tank Capacity:	10L
Detergent Pump:	Fitted

- ☐ Drain 2" BSP Gravity
- ◆ Hot water supply 3/4" BSP.
- ⊕ Cold water supply 3/4" BSP.

Goldstein Eswood continually works on improving our products, so dimensions may change without notice. For any construction critical dimensions please check with us.

GOLDSTEIN ESWOOD
 211 - 217 Woodpark Rd SMITHFIELD NSW 2164
 T: 1800 013 123 F: 02 96045420
 E: sales@goldsteineswood.com.au

