

robot @ coupe®

 **JUICERS**
J 80 Ultra • J 100 Ultra

New



BARS – TAKEAWAY OUTLETS – RESTAURANTS – HOTELS – CANTEENS

▶ J 80 Ultra JUICER

Pulp ejected straight into container.
Supplied with 6.5-litre large-capacity pulp container with translucent sides to monitor pulp levels.



▶ J 100 Ultra JUICER

« Specially designed for intensive use »

ERGONOMICS



Removable stainless-steel basket



Drip tray



No-splash spout

PERFORMANCE



High output and unrivalled juice quality

LONG LIFESPAN



Stainless-steel bowl and motor unit for easy aftercare

POWER



700 W

1000 W

Ultra-quiet heavy-duty motor



New



▶ J 100 Ultra JUICER

2 WAYS OF USING YOUR JUICER

1 Continuous pulp ejection

Ejection chute sending continuous flow of pulp directly into bin under worktop.



2 Pulp ejected into container

7.2-litre large-capacity translucent pulp container



JUICERS

J 80 Ultra • J 100 Ultra

Big feed hopper (Ø 79 mm) allows to process entire fruits and vegetables such as apple or tomato.



7 SECONDS
=
A GLASS OF

*ULTRA-FRESH
JUICE!*

JUICERS

J 80 Ultra • J 100 Ultra



Product benefits:

- **High power, low noise levels:** the powerful, heavy-duty motor operates at a speed of 3,000 rpm, meaning that the juice oxidizes less quickly. The resulting juices are particularly smooth and bursting with flavour. The noise levels of the J 80 Ultra/ J 100 Ultra are so low that they can be used right in front of the customer.
- **Practical:** the drip tray can hold up to 300 ml of liquid, meaning that your worktop stays clean.
- **Large-capacity pulp container!** the 6.5-litre (J 80 Ultra) or the 7.2-litre (J 100 Ultra) translucent container slots neatly under the ejector spout, to avoid pulp splashing onto the worktop.

The J 100 Ultra can be used in two ways:

1. Continuous pulp ejection: ejection chute sending a continuous flow of pulp directly into a bin beneath the worktop.
 2. Pulp ejected into a container: 7.2-litre large-capacity translucent pulp container.
- **Centrifugal juicer basket:** the basket can be removed (no special tool required) for easy cleaning.




Users:

Bars, takeaway outlets, restaurants, hotels, canteens



In short:

They have all the qualities you could ask for in a juicer: fast, resilient, efficient, and top-quality juice.



Video available on:
www.robot-coupe.com

INDUCTION MOTOR


- Heavy-duty motor designed to withstand intensive use for greater reliability and a longer lifespan.
- Ball bearing-supported motor for ultra-quiet, vibration-free operation.
- Direct-drive motor:
 - extra power
 - no belt
- Maintenance-free: no wearing parts (no brushes)
- Stainless-steel motor shaft



CE mark

	Electrical characteristics			Dimensions (mm)				Weight (kg)	
	Speed (rpm)	Power (W)	Voltage* (A)	A	B	C	D	Net	Gross
J 80 Ultra	3,000	700	230 V/ 50 Hz/ 1	505	535	235	162	10.9	12.8
J 100 Ultra	3,000	1,000	230 V/ 50 Hz/ 1	596	538	235	256	12.9	15.6

* Other voltages available

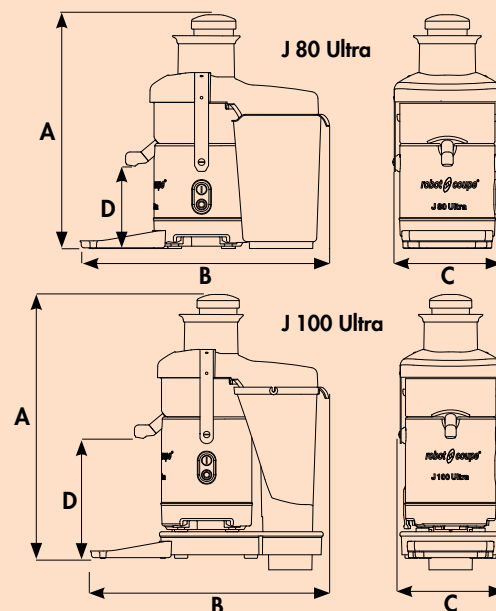

robot coupe

HEAD OFFICE, FRENCH, EXPORT AND MARKETING DEPARTMENT:
Tel.: + 33 1 43 98 88 33 - Fax: + 33 1 43 74 36 26
email: international@robot-coupe.com

Robot-Coupe Australia: Tel.: (02) 9478 0300 - Fax: (02) 9460 7972
New Zealand: Tel.: 0800 716161 - Fax: 0800 716162
email: orders@robotcoupe.com.au

Robot-Coupe U.K. LTD: Tel.: 020 8232 1800 - Fax: 020 8568 4966
2, Fleming Way, Isleworth, Middlesex TW7 6EU
email: sales@robotcoupe.co.uk

Robot Coupe U.S.A.: Tel.: 1-800-824-1646 - Fax: 601-898-9134
email: info@robotcoupeusa.com - website: www.robotcoupeusa.com

www.robot-coupe.com

DISTRIBUTOR

STANDARDS: Machines in compliance with:

- The essential requirements of the following European directives and with the corresponding national regulations: 2006/42/EC, 2006/95/EC, 2004/108/EC, 1935/2004/EC, 10/2011/EU, "RoHS" 2002/95/EC, "WEEE" 2002/96/EC.
- The requirements of the European harmonized standards and with the standards specifying the hygiene and safety requirements: EN ISO 12100 - 2010, EN 60204-1 - 2006, EN 1678 - 1998, EN 60529-2000: IP 55, IP 34.

