




Product Advantages:


- Significantly **less manual pre-cleaning and second runs** by intensiv wash cycles with **steam injection** and **direct injection of detergent**
- **Extra capacity** by side wash: e.g. up to 6 GN-trays 1/1, 4 EN2 container ...
- Ease of operation with **single button operation, colour coded status** and **remaining cycle time indication**
- **Easy to clean** and **hygienic safety** by **self cleaning, hygiene cycle** and rounded edges in the wash chamber
- **Double walled housing** for **low noise level** and **energy efficiency**
- **Useable inside dimensions** w x d x h: 520 x 808 x 840 mm
- **No clogging of wash nozzles** by strainer sensor control
- Completely equipped with softener, rinse pressure pump, drain pump and chemical dispensers
- **Integrated prewash** by GENIUS-X² fine filter system: achieving better wash results due to permanent filtration of wash water – **saving energy and detergent**

Technical Data

① flexible drain hose 2000 mm	24mm inner / 28mm outer diam.
② fresh water connection: pressure hose 1500 mm flow pressure	R 3/4" inside 0,5 - 10 bar max. 60°C
③ power cord	1800 mm
④ chemical suction hoses	2500 mm each
Cycle times	150 sec. 280 sec. 400 sec. endless
Rinse water consumption	8 l / rack
Tank capacity	80 l
Tank heating	3.3 kW
Booster loading	15 kW
Voltage	400 / 50 / 3 / N
Total loading	18.2 kW 3 x 35 A
Pump capacity	2.7 kW / 1150 l/min.
Noise level	65 dB(A)
weight	~205 kg

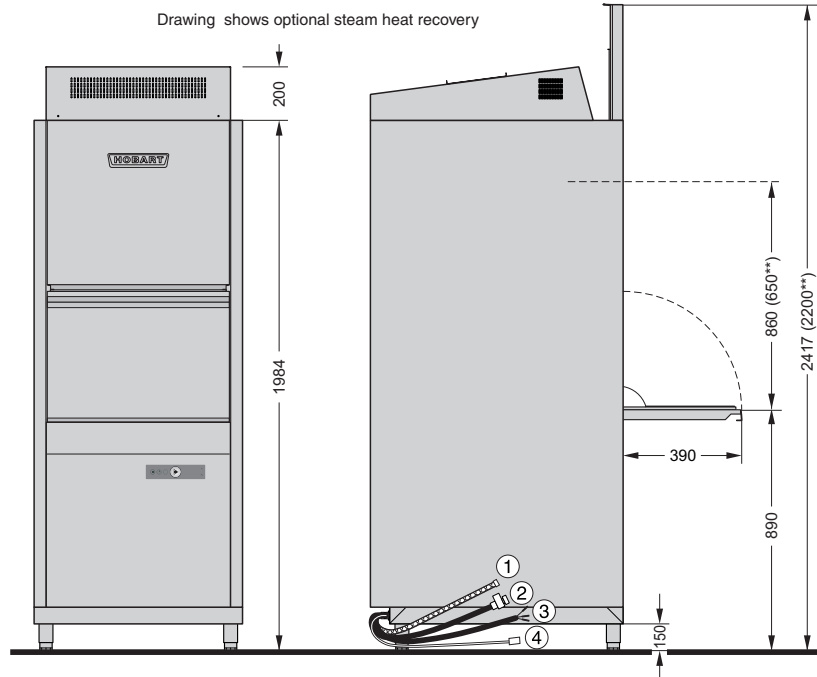

** Door opening can be limited to 2200mm

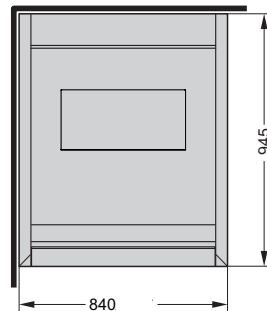

± 15 mm adjustable feet

Capacity of built-in water softener		
at	7°dH	600 cycles
	21°dH	150 cycles
	30°dH	50 cycles

In case of permanent operation or high water hardness we recommend a site-placed water softener.