

Push-through utensil washer with 850 mm useable loading height.




Tabling optional

**Product Advantages:**

- Ease of operation with **single button operation**, **colour coded status** and **remaining cycle time indication**
- **Easy to clean** and **hygienic safety** by **self cleaning**, **hygiene cycle** and rounded edges in the wash chamber
- **Double walled housing** for **low noise level** and **energy efficiency**
- **Useable inside dimensions** w x d x h: 1320 x 735 x 850 mm
- **No clogging of wash nozzles** by strainer sensor control
- Completely equipped with rinse pressure pump, drain pump and chemical dispensers
- **Integrated prewash** by GENIUS-X<sup>2</sup> fine filter system: achieving better wash results due to permanent filtration of wash water – **saving energy and detergent**
- **30% lower operational cost** by reduced rinse consumption
- **High wash performance** by optimised wash system

**Technical Data**

① flexible drain hose 2000 mm	24mm inner / 28mm outer diam.
② fresh water connection: pressure hose 1500 mm flow pressure	R 3/4" inside 0,5 - 10 bar max. 60°C
③ power cord	1800 mm
④ chemical suction hoses	2500 mm each
cycle times	120 sec. 240 sec. 360 sec. endless
water consumption	8 l / rack
tank capacity	130 l
tank heating	6 kW
booster loading	15 (9) kW
voltage	400 / 50 / 3 / N
total loading	21.2 (15.7) kW 3 x 50 (35) A
pump capacity	2 x 2.7 kW 2 x 1150 l/min.
noise level	68 dB(A)
weight	~415 kg

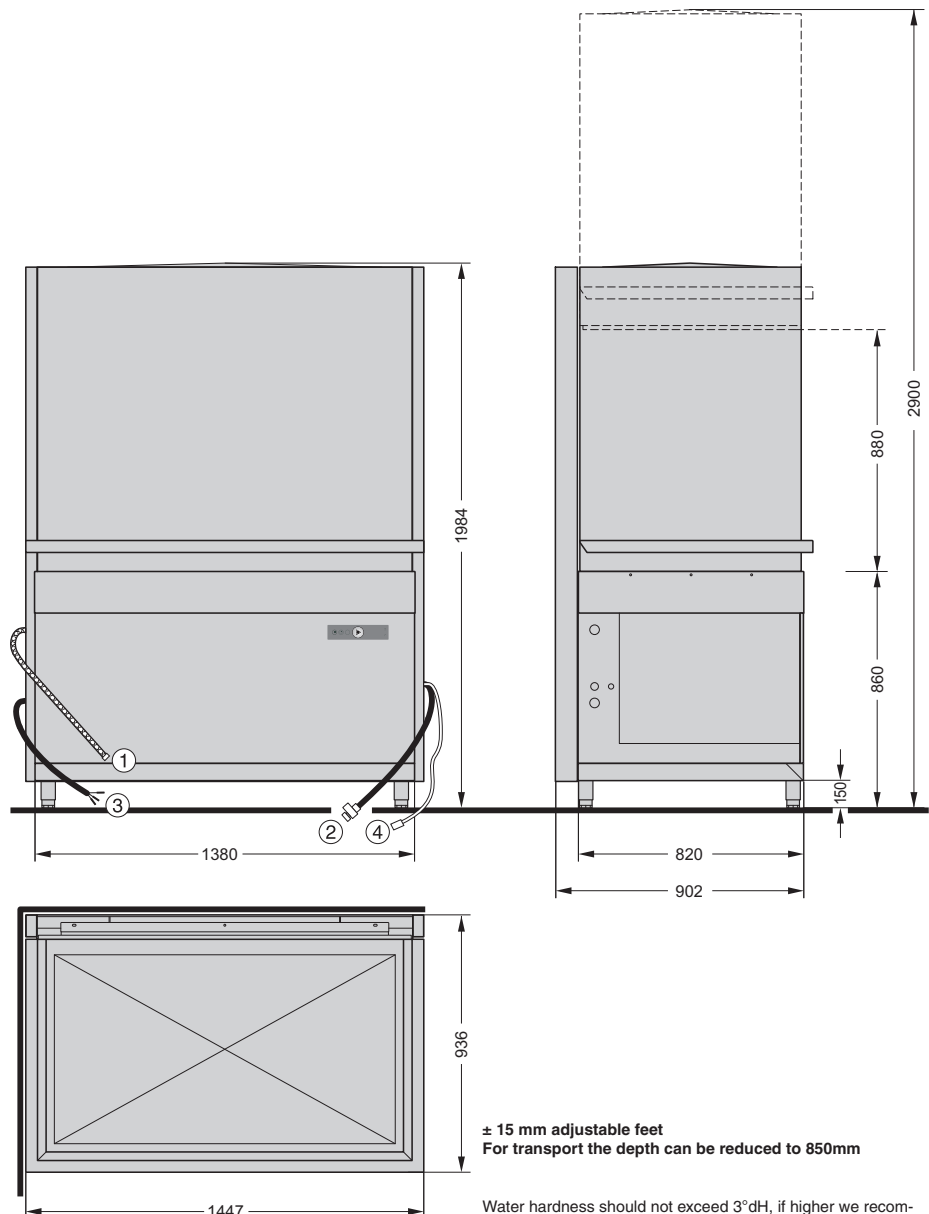

± 15 mm adjustable feet  
For transport the depth can be reduced to 850mm

Water hardness should not exceed 3°dH, if higher we recommend using a water softener.  
If mineral content is high a demineraliser may be advisable.