

## specifications

## Refrigeration

## RF7.UBF.2.SD

ReFlex Series, 2 Door (Solid), Underbench Freezer



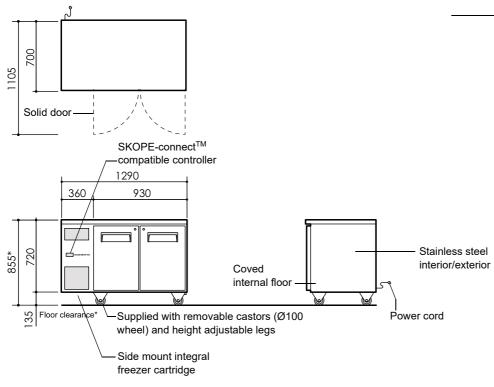

**CABINET** 

Model ID RF7.UBF.2.SD SKOPE ID RF7UBF2-SCLH-SD

Doors 2 × self-closing, lockable, solid swing doors. LH, RH Internal door opening 2 × door openings: 560mm high × 355mm wide

Shelves 4 × adjustable height shelves: 395mm wide × 510mm deep

Worktop Total thickness 45mm (0.7mm 304 AISI stainless steel over insulating

cyclopentane foamed core)

Material 304 AISI stainless steel interior and exterior

**PERFORMANCE** 

Max. ambient temp. 40°C

Temperature range -21°C to -18°C (adjustable with SKOPE-connect -26°C to -12°C)

**ELECTRICAL** 

Climate class 5 (40°C/40% RH)

Interior lighting 1 × 400mm, 4W LED light (door activated)

Power cord Supplied with 2.6m, 10 Amp plug and lead

Power supply 220-240 Volts a.c. 50 Hz, single phase supply

Current draw 4.0 Amps (includes unit 2.0 Amps)

**REFRIGERATION** 

Controller SCS Connect (SKOPE-connect<sup>TM</sup> compatible)

Connectivity interface Bluetooth® wireless technology

Refrigeration system Side mounted, integral, removable freezer cartridge (part number

**ULKDNI-0023)** 

Refrigerant R290 / 90g (natural refrigerant)

Nominal capacity 500 Watts

Heat rejection (Avg/peak) 150 Watts/175 Watts
Drainage No plumbing required

SKOPE Industries Limited reserve the right to alter specifications without notice. Copyright © 2019 SKOPE Industries Limited

## SKOPE INDUSTRIES LIMITED

Australian Freephone: 1800 121 535, New Zealand Freephone: 0800 947 5673

Email: skope@skope.com, Website: www.skope.com

DI	в л			$\sim$	$\sim$	$\sim$
	IV/I	_	N	•	( )	

	External	Internal	
Height	855mm*	570mm	
Width	1290mm	820mm	
Depth	700mm	530mm	
Floor area	0.9m <sup>2</sup>	•	
Weight	112kg		
Internal volume	248 litres		

<sup>\*</sup> With supplied castors fitted. See height variation below

Height variation	
Supplied castors	855mm
Supplied height adjustable legs	865mm - 905mm
No castors or legs	725mm

Dimensional tolerances				
Before installing this cabinet allow the following dimensional tolerances:				
Linear dimensions	Overall cabinet dimensions			
Less than 1 metre	±5mm			
More than 1 metre	-5mm to +10mm			
	Length of multiple cabinets			
	At each joint	At each end wall		
Less than 1 metre	±5mm	+15mm		
More than 1 metre	-5mm to +10mm	+15mm		

Ventilation requirements	
Тор	Not required
Sides	Not required
Back	Not required
Bottom	Not required

PSS0631 Rev. 1.3 Aug. 2019



