



Recirculating Undercounter Dishwasher / Glasswasher

MODELS: UC25N, UC25NG & UC25NH

- UC25N: Up to 500 plates per hour
- UC25NG: Up to 2000 Glasses per hour
- UC25NDP & UC25NGDP: Models fitted with Drain Pumps
- 3 Wash programs to match degree of soil
- Durable stainless steel wash arms
- Integrated detergent and rinse aid pump
- Full width tank strainers and dual filtration
- Automatic water temperature interlock ensures correct sanitization
- Easy to use electro mechanical controls



FEATURES

BENEFITS

ACCOMODATES 500 x 500MM BASKETS	➔	UP TO 500 x 250MM DIA PLATES PER HOUR UP TO 2000 GLASSES PER HOUR
EASILY REMOVABLE SPRAY ARMS AND FILTERS	➔	REDUCED CONTAMINATION OF WASH WATER WITH SOIL GIVES LOW DETERGENT CONSUMPTION
LOW ENERGY CONSUMPTION	➔	OPERATES FROM SINGLE PHASE 15 AMP ELECTRICAL SUPPLY
DETERGENT AND RINSE AID PUMP FITTED AS STANDARD	➔	INTEGRATED HOSES DROP STRAIGHT INTO CHEMICALS
ALL STAINLESS STEEL CONSTRUCTION	➔	ENSURES RIGIDITY AND DURABILITY
SAFETY CUT-OUT FITTED TO DOOR	➔	ENSURES SAFE OPERATION



“ The ONLY HACCP approved Warewashing made in Australia for your protection ”



	10 YEARS GUARANTEE OF PARTS AVAILABILITY
	6 YEARS WARRANTY ON STAINLESS BODY
	2 YEARS WARRANTY ON WASH PUMP
	1 YEAR WARRANTY ON PARTS & LABOUR




1800 013 123

goldsteineswood.com.au



Recirculating Undercounter Dishwasher / Glasswasher

UC25N (500 x 500 Racks) - DISHWASHER

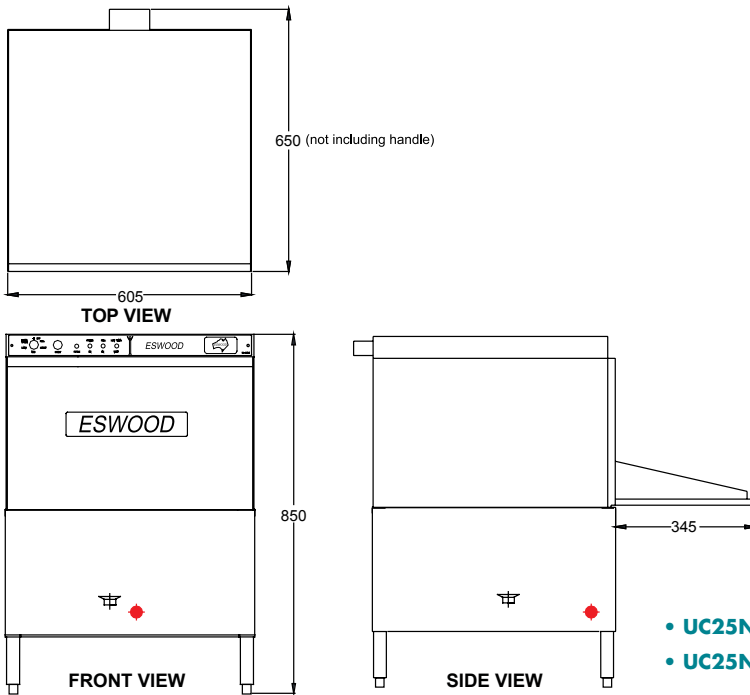


MODEL: UC25N Specifications:	
Dimensions (WxDxH):	605 x 650 x 850 mm
Depth with door open:	995 mm
Rack Size - NK (WxD):	500 x 500 mm
Weight:	68 kg
Electric Connection:	15A Single Phase - 240V
Rating:	3.6 kW
Water Supply:	65°C / 2-4 bar (28-56 psi)
Packed:	0.3 m ³
Meal Service:	30 - 60 pax
Wash Cycle:	60 sec , 90 sec , 120 sec
Water Consumption:	3.5L Hot Cycle
Tank Capacity:	18L
Detergent Pump:	Fitted
Rinse Aid Injector:	Fitted

- ⌘ Drain 1 1/2" BSP Gravity
- ◆ Hot water supply 3/4" BSP.

- **UC25NDP:** Model with Drain Pump fitted
- **UC25NH:** Model at bench height (Overall Height: 1070mm)

UC25NG (500 x 500 Racks) - GLASSWASHER

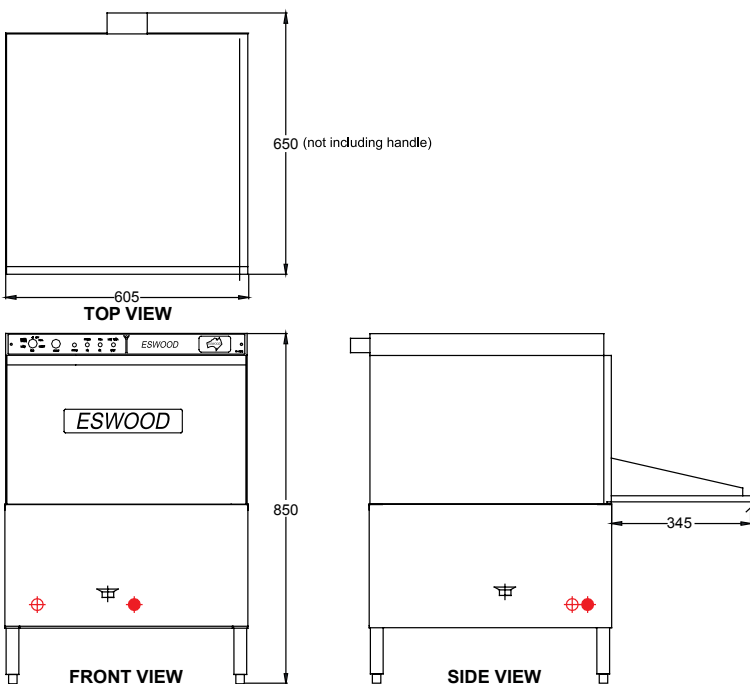

MODEL: UC25NG Specifications:	
Dimensions (WxDxH):	605 x 650 x 850 mm
Depth with door open:	995 mm
Rack Size - NK (WxD):	500 x 500 mm
Weight:	68 kg
Electric Connection:	15A Single Phase - 240V
Rating:	3.5 kW
Water Supply:	65°C / 2-4 bar (28-56 psi)
Packed:	0.3 m ³
Service:	1800 glasses per hour
Wash Cycle:	60 sec Hot cycle 75 sec Hot & Cold cycle 3 min scrub cycle
Water Consumption:	3.5L Hot cycle 3L Cold cycle
Tank Capacity:	18L
Detergent Pump:	Fitted

- ⌘ Drain 1 1/2" BSP Gravity
- ◆ Hot water supply 3/4" BSP.
- ⊕ Cold water supply 3/4" BSP.

- **UC25NGDP:** Model with Drain Pump fitted

Options

- **Drain Pump:** Fitted when gravity drain is not applicable.
- **Rinse Pump:** Fitted when water pressure is below 28 psi.
- **Digital Temperature Display.**

Goldstein Eswood continually works on improving our products, so dimensions may change without notice. For any construction critical dimensions please check with us.

GOLDSTEIN ESWOOD
 211 - 217 Woodpark Rd SMITHFIELD NSW 2164
 T: 1800 013 123 F: 02 96045420
 E: sales@goldsteineswood.com.au

