



1400mm height

SlimLED undershelf LED strip lighting



SIDE VIEW

470

Airflow In

Airflow Out



STANDARD FEATURES

- GlassMax minimalist canopy (more glass/less frame) that maximises the visibility of displayed food from all angles
- Full glass top for top down viewing of displayed food
- Mitrex frame that is flush welded with mitred joins to give both robustness and a designer finish
- Five food display levels: four shelves plus bottom trays; offering 930 more extensive display area than comparable cabinets
- Chrome wire shelving system that is height adjustable in 25mm increments and interchangeable between horizontal and
- CrumbCatch feature in bottom trays that collects falling crumbs and food
- High quality European and Japanese refrigeration components
- Designed to operate at 3 5°C in room environments up to
- > Fan forced air flow for even temperature distribution
- **Lifrost** intelligent defrost control that minimises time in defrost to better maintain consistent food temperature
- Refrigeration optimised to provide a high humidity environment that maintains food quality for longer
- **DuraCoat** system providing a protective coating over the refrigeration coil to prevent food acid corrosion.
- **SureVap** self-evaporating system for condensate—no drain reauired
- Condenser air vented through base—no unsightly vents
- SlimLED under-shelf LED strip lighting with 12V safety
- Rear sliding, double-glazed doors on friction-free, low wear tracks (doors removable for cleaning)
- Mounted on swivel and lockable castors allowing easy movement of cabinet

For Factory Options refer to page 54 For Cabinet Accessories refer to page 64




^{*}Add extra 15mm for protruding control panel and switches

YORK: **CHILLED**

A classy serve-over cabinet that maximises height and display area, while still allowing interaction between staff and customers. With its framed top and front glass this cabinet makes displayed food stand out.

4°C operating temperature






STANDARD FEATURES

- Open front cabinet for "grab and go"
- Stainless steel top
- Four food display levels: three shelves plus base
- Chrome wire shelving system that is height adjustable in 25mm increments and interchangeable between horizontal and tilted positions
- High quality European refrigeration components
- Designed to operate at 3 5°C in room environments up to 22°C with no air movement across open face
- DuraCoat system providing a protective coating over the refrigeration coil to prevent food acid corrosion
- ifrost intelligent defrost control that minimises time in defrost to better maintain consistent food temperature
- SureVap self-evaporating system for condensate—no drain required
- Condenser air vented through base
- SlimLED under-shelf LED strip lighting with 12V safety
- Mounted on lockable castors allowing easy movement of cabinet

For Factory Options refer to page 54 For Cabinet Accessories refer to page 64



YORK: CHILLED IMPULSE


A stylish open fronted cabinet that simply invites the customer in.

4°C operating temperature

Model	YCO9	YCO12		
Length	900mm	1200mm		
Depth*	640mm	640mm 1400mm		
Height	1400mm			
Available Display Area	1.4m²	1.9m² 10A Plug		
Power Connection	10A Plug			

^{*}Add extra 15mm for protruding control panel and switches




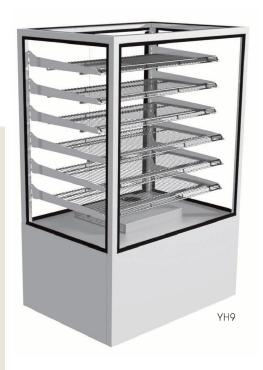

STANDARD FEATURES

- GlassMax minimalist canopy (more glass/less frame) that maximises the visibility of displayed food from all angles
- > Full glass top for top down viewing of displayed food
- Mitrex frame that is flush welded with mitred joins to give both robustness and a designer finish
- Six shelf levels; offering more extensive display area than 930 comparable cabinets
- Chrome wire shelving system that is height adjustable in 25mm increments and interchangeable between horizontal and tilted positions
- > High quality European heating and control components
- Thermostatically controlled to operate at a temperature between 30 – 95°C
- > Fan forced air flow for even heat distribution
- > Rapid response element for better temperature control
- > **SlimLED** under-shelf LED strip lighting with 12V safety
- Rear sliding doors on friction-free, low wear tracks (doors removable for cleaning)
- Mounted on swivel and lockable castors allowing easy movement of cabinet

For Factory Options refer to page 54
For Cabinet Accessories refer to page 64




YORK: HEATED

Offering great space to display the widest range of hot food product the York heated cabinets create a great look while still allowing excellent server-customer communication.

up to 95°C operating temperature

Model	YH6	YH9	YH12	YH15
Length	600mm	900mm	1200mm	1530mm
Depth*	640mm	640mm	640mm	640mm
Height	1400mm	1400mm	1400mm	1400mm
Available Display Area	1.3m²	2.1m²	2.9m²	3.8m²
Power Connection	10A Plug	10A Plug	20A Plug	20A Plug


^{*}Add extra 15mm for protruding control panel and switches

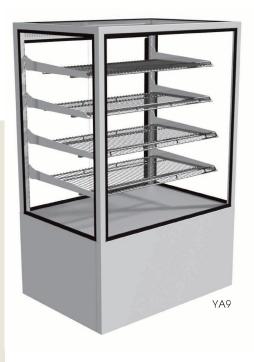

STANDARD FEATURES

- GlassMax minimalist canopy (more glass/less frame) that maximises the visibility of displayed food from all angles
- > Full glass top for top down viewing of displayed food
- Mitrex frame that is flush welded with mitred joins to give both robustness and a designer finish
- Five food display levels: four shelves plus base; offering more extensive display area than comparable cabinets
- Chrome wire shelving system that is height adjustable in 25mm increments and interchangeable between horizontal and tilted positions
- > **SlimLED** under-shelf LED strip lighting with 12V safety
- > Top venting to allow heat dissipation
- Rear sliding doors on friction-free, low wear tracks (doors removable for cleaning)
- Mounted on swivel and lockable castors allowing easy movement of cabinet

For Factory Options refer to page 54
For Cabinet Accessories refer to page 64



YORK: AMBIENT

This large serve-over cabinet provides ample space to display ambient product while showing the food at its best.

Model	YA6	YA9	YA12	YA15	YA18	YA24
Length	600mm	900mm	1200mm	1530mm	1770mm	2370mm
Depth*	640mm	640mm	640mm	640mm	640mm	640mm
Height	1400mm	1400mm	1400mm	1400mm	1400mm	1400mm
Available Display Area	1.13m ²	1.8m²	2.5m²	3.2m ²	3.6m²	5m²
Power Connection	10A Plug	10A Plug	10A Plug	10A Plug	10A Plug	10A Plug

^{*}Add extra 15mm for protruding control panel and switches