
specifications



Project:

RF7.UBR.2.SD

ReFlex Series, 2 Door (Solid), Underbench Fridge

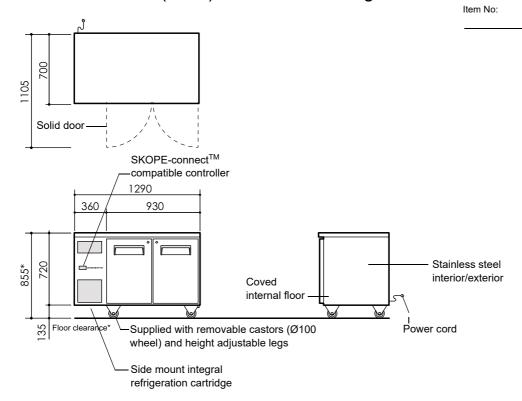

CABINET	
Model ID	RF7.UBR.2.SD
SKOPE ID	RF7UBR2-SCLH-SD
Doors	2 × self-closing, lockable, solid swing doors. LH, RH
Internal door opening	2 × door openings: 560mm high × 355mm wide
Shelves	4 × adjustable height shelves: 395mm wide × 510mm deep
Worktop	Total thickness 45mm (0.7mm 304 AISI stainless steel over insulating cyclopentane foamed core)
Material	304 AISI stainless steel interior and exterior
PERFORMANCE	
Max. ambient temp.	40°C
Temperature range	1°C to 4°C (adjustable with SKOPE-connect -2°C to 10°C)
ELECTRICAL	
Climate class	5 (40°C/40% RH)
Interior lighting	1 × 400mm, 4W LED light (door activated)
Power cord	Supplied with 2.6m, 10 Amp plug and lead
Power supply	220-240 Volts a.c. 50 Hz, single phase supply
Current draw	2.0 Amps (includes unit 1.5 Amps)
REFRIGERATION	
Controller	SCS Connect (SKOPE-connect [™] compatible)
Connectivity interface	Bluetooth [®] wireless technology
Refrigeration system	Side mounted, integral, removable refrigeration cartridge (part number ULKCNI-0021)
Refrigerant	R290 / 80g (natural refrigerant)
Nominal capacity	450 Watts
Heat rejection (Avg/peak)	75 Watts/80 Watts
Drainage	No plumbing required

DIMENSIONS					
	External	Internal			
Height	855mm*	570mm			
Nidth	1290mm	820mm			
Depth	700mm	530mm			
loor area	0.9m ²				
Neight	106kg				
nternal volume	248 litres				

* With supplied castors fitted. See height variation below

Height variation	
Supplied castors	855mm
Supplied height adjustable legs	865mm - 905mm
No castors or legs	725mm

Dimensional tolerances					
Before installing this cabinet allow the following dimensional tolerances:					
Linear dimensions	Overall cabinet d	imensions			
Less than 1 metre	±5mm				
More than 1 metre	-5mm to +10mm				
	Length of multiple cabinets				
	At each joint	At each end wall			
Less than 1 metre	±5mm	+15mm			
More than 1 metre	-5mm to +10mm	+15mm			

Ventilation requirements		
Тор	Not required	
Sides	Not required	
Back	Not required	
Bottom	Not required	

PSS0585 Rev. 1.3 Aug. 2019

Australian Freephone: 1800 121 535, New Zealand Freephone: 0800 947 5673 Email: skope@skope.com, Website: www.skope.com

SKOPE INDUSTRIES LIMITED