




BC12

STANDARD FEATURES

- › **GlassMax** minimalist canopy (more glass/less frame) that maximises the visibility of displayed food from all angles
- › **Mitrex** frame that is flush welded with mitred joints to give both robustness and a designer finish
- › **Integra** tray race fully integrated with base: includes removable bag holder and tong holder
- › Five food display levels: four shelves plus bottom trays; offering more extensive display area than comparable cabinets
- › Chrome wire shelving system that is height adjustable in 25mm increments and interchangeable between horizontal and tilted positions
- › **CrumbCatch** feature in bottom trays that collects falling crumbs and food
- › High quality European and Japanese refrigeration components
- › Designed to operate at 3 – 5°C in room environments up to **32°C**
- › Fan forced air flow for even temperature distribution
- › **ifrost** intelligent defrost control that minimises time in defrost to better maintain consistent food temperature
- › Refrigeration optimised to provide a high humidity environment that maintains food quality for longer
- › **DuraCoat** system providing a protective coating over the refrigeration coil to prevent food acid corrosion.
- › **SureVap** self-evaporating system for condensate—no drain required
- › Condenser air vented through base—no unsightly vents
- › Framed glass top for top down viewing of displayed food
- › **SlimLED** under-shelf LED strip lighting with 12V safety
- › Front and Rear sliding double-glazed doors on friction-free, low wear tracks (doors removable for cleaning)
- › Mounted on swivel and lockable castors allowing easy movement of cabinet

SIDE VIEW

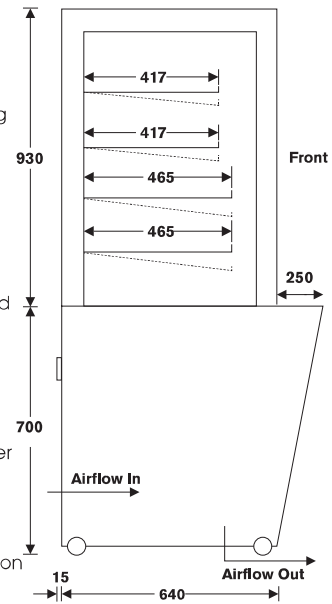

BAKER: CHILLED

A fully integrated self-serve cabinet that makes an impact in any location and allows displayed food to simply look great.

4°C operating temperature

For Factory Options refer to page 54

For Cabinet Accessories refer to page 64

Model	BC6	BC9	BC12	BC15	BC18	BC24
Length	600mm	900mm	1200mm	1530mm	1770mm	2370mm
Depth*	640mm	640mm	640mm	640mm	640mm	640mm
Height	1630mm	1630mm	1630mm	1630mm	1630mm	1630mm
Available Display Area	1.13m ²	1.8m ²	2.5m ²	3.2m ²	3.6m ²	5m ²
Power Connection	10A Plug	10A Plug	10A Plug	10A Plug	10A Plug	10A Plug

*Add extra 15mm for protruding control panel and switches